



CONTENTS

Milestones

2

Borusan
Holding at a Glance

4

Borusan
Mannesmann in
Brief

5




Energy

14


OCTG
Casing and Tubing

16

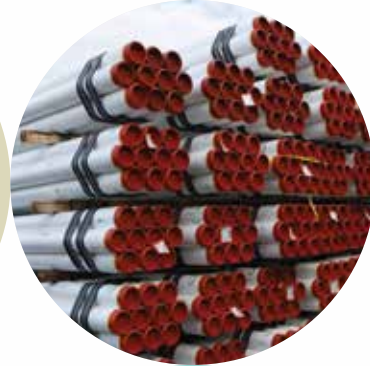

ERW Line Pipes

20

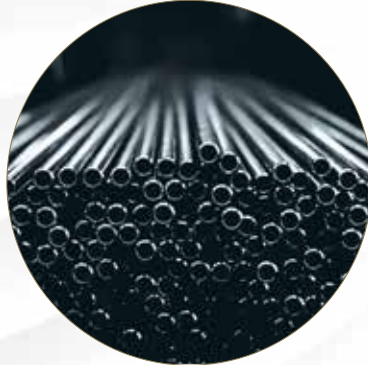

ERW Water
Pipes

28

Fire Sprinkler
Pipes-Firesist

33

Water Well
Casing Pipes

40

Self
Anchor

47



Foundation /
Piling Tubes

48

Engineering
Technologies

50

Global Presence

6

Customer Benefits

10

Our Team

12

QEHS Management

13



Spirally Welded Line Pipes

22

Tubes for Pressure Purpose / Boiler Tubes

24



Water Transmission

26

Spirally Welded Water Line Pipes

41



Construction

42

Circular Hollow Sections

44



Automotive Tubes

54

Industrial Applications

56



Coatings and Linings

62



MILESTONES

1944

Foundation of
Borusan

1968

Halkalı ERW
Pipe Plant
started
production,
İstanbul

1979

Borusan Port
inagurated

1998

Borusan and
Mannesmann
merged their
pipe business
activities in
Turkey

2004

The company
name is
amended
as "Borusan
Mannesmann"

1958

Borusan Pipe
was founded

1976

Gemlik ERW
Pipe Plant
started
production,
Bursa

1994

Borusan Pipe
quoted on
İstanbul Stock
Exchange

2001

Acquisition of
cold drawn
pipe plant in
Vobarno, Italy

2009

Borusan
Port
expansion
completed

1969

First exports

2014

Houston OCTG
Plant started
production,
Texas

2019

Gemlik
Automotive
Plant

2011

Gemlik HSAW
Pipe Plant
started
production,
Bursa

2016

Bursa
Service
Center

2023

Romania
Service
Center

Coming Soon...



BORUSAN HOLDING AT A GLANCE












In 4 major business areas, with 11.700 dedicated employees...

Borusan Group has been among the pioneers of industrialization and corporate governance in Turkey throughout its 78 years of history. The group currently operates in four major business areas including steel, distributorship, logistics and energy. In 2006 Borusan Group signed the United Nations' Global Compact Policy and it supports and adheres by the principles of "good corporate governance" and "sustainability" as a prerequisite component for long-term and permanent success.



Contribution to Community

Borusan has adopted the principle of giving back to the community with which it does business. In order to better carry out Borusan's social responsibilities, Borusan Kocabiyik Foundation was established in 2008, merging the activities of Asım Kocabiyik Culture and Education Foundation and Borusan Culture and Arts under a single roof. With a deep social responsibility consciousness, the Borusan Group established the Borusan Center for Culture & Arts on October 15, 1997. The Borusan Center for Culture and Arts is a member of the International Society of Contemporary Music (ISCM) and the European Music Council (EMC) and organizes the annual Mediterranean Contemporary Music Days. Though it began with modest numbers, the chamber orchestra was transformed into one of the leading Turkish philharmonic ensembles under its former artistic director and principal conductor Sascha Goetzel. Giving its concert premiere in May 1999, BIPO has since become a prominent element of Istanbul's cultural scene.

Steel		Distributorship		Logistics	Energy
The Pipe Group	The Flat Steel Group	The Earth Moving Equipments Group	The Automotive Group	Borusan Lojistik	Borusan EnBW Enerji
Borusan Mannesmann Borusan İstikbal Ticaret	Borçelik	Borusan CAT 	Borusan Otomotiv Supsan Borusan Araç İhale     		
Partners					
 A Member of the Salzgitter Group			Giwa Holding GmbH 		


BORUSAN MANNESMANN IN BRIEF

Borusan Mannesmann is among the leading manufacturer of steel pipes in the world with its 1.4 million tons of annual production capacity.

Steel pipe manufacturing is the core business of the Borusan Group, a conglomerate made up of 15 companies spread over four different industries; steel, distributorship, logistics and energy with around 3.7 billion USD turnover and more than 11.700 employees. Borusan Mannesmann currently continues its production activities with its 6 facilities in 3 different countries in Turkey, Italy and USA.

The company's product range includes; water pipes, oil and gas line pipes, industrial pipes and profiles, installation pipes, OCTG pipes and hollow sections. Borusan Mannesmann has wide experience and range of track records in oil and gas pipeline projects both in domestic and international markets with high grade API standards.

A dynamic, highly qualified staff, regularly trained to keep abreast of new manufacturing and management, ensure that production conforms to exacting quality standards. Borusan Mannesmann has become the standard-bearer for trust and quality in the sector by bringing added value to products and services with more than 2400 highly qualified employees and the continuously improving work force.

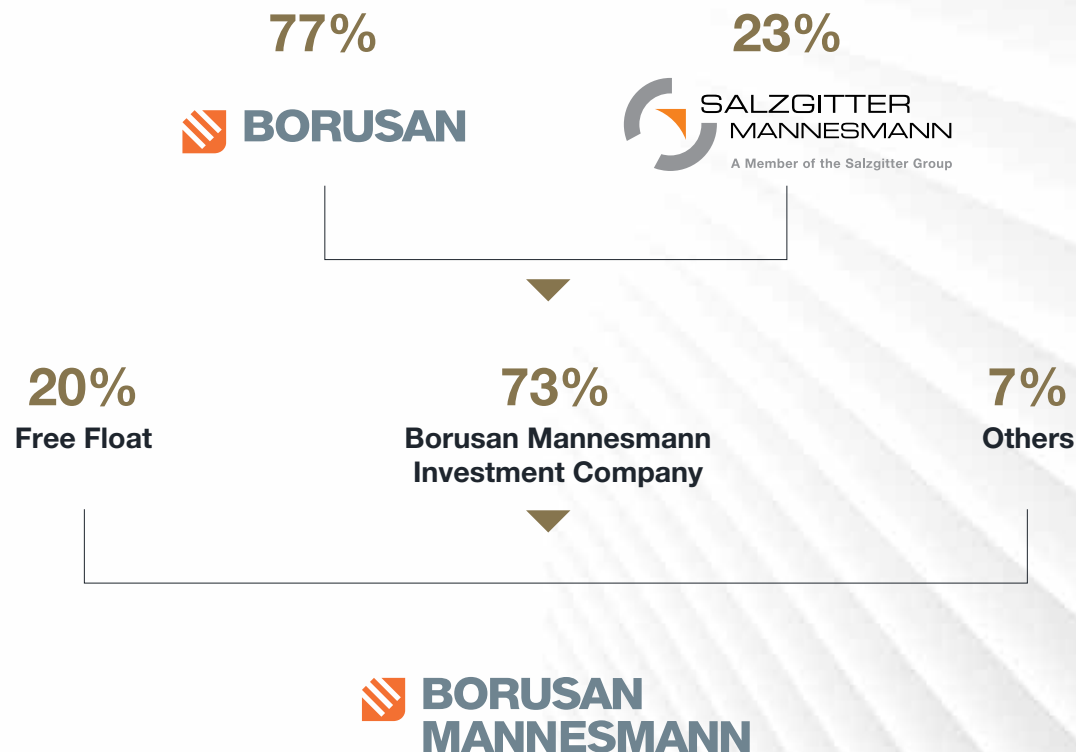

8 FACILITIES IN 3 CONTINENTS

Turkey

Gemlik ERW Pipe Plant

Sectors served: Energy, Construction,
Water Transmission

Workforce : 750
Area : 388.000 m²

Turkey

Gemlik HSAW Pipe Plant

Sectors served: Energy, Construction,
Water Transmission

Workforce : 140
Area : 70.000 m²

Turkey

Gemlik Automotive Pipe Plant

Sectors served: Automotive

Workforce : 130
Area : 20.000 m²

Turkey

Halkalı Plant

Sectors served: Engineering Technologies

Workforce : 450
Area : 67.000 m²



Houston
Plant

USA
Texas

Turkey

Bursa Service Center

Sectors served: Automotive

Workforce : 60
Area : 10.000 m²

USA / Texas

Houston Plant

Sectors served: Energy Sector

Workforce : 300
Area : 500.000 m²

Italy

Vobarno Plant


Sectors served: Engineering Technologies

Workforce : 90
Area : 24.000 m²

Romania

Romania Service Center

Coming Soon

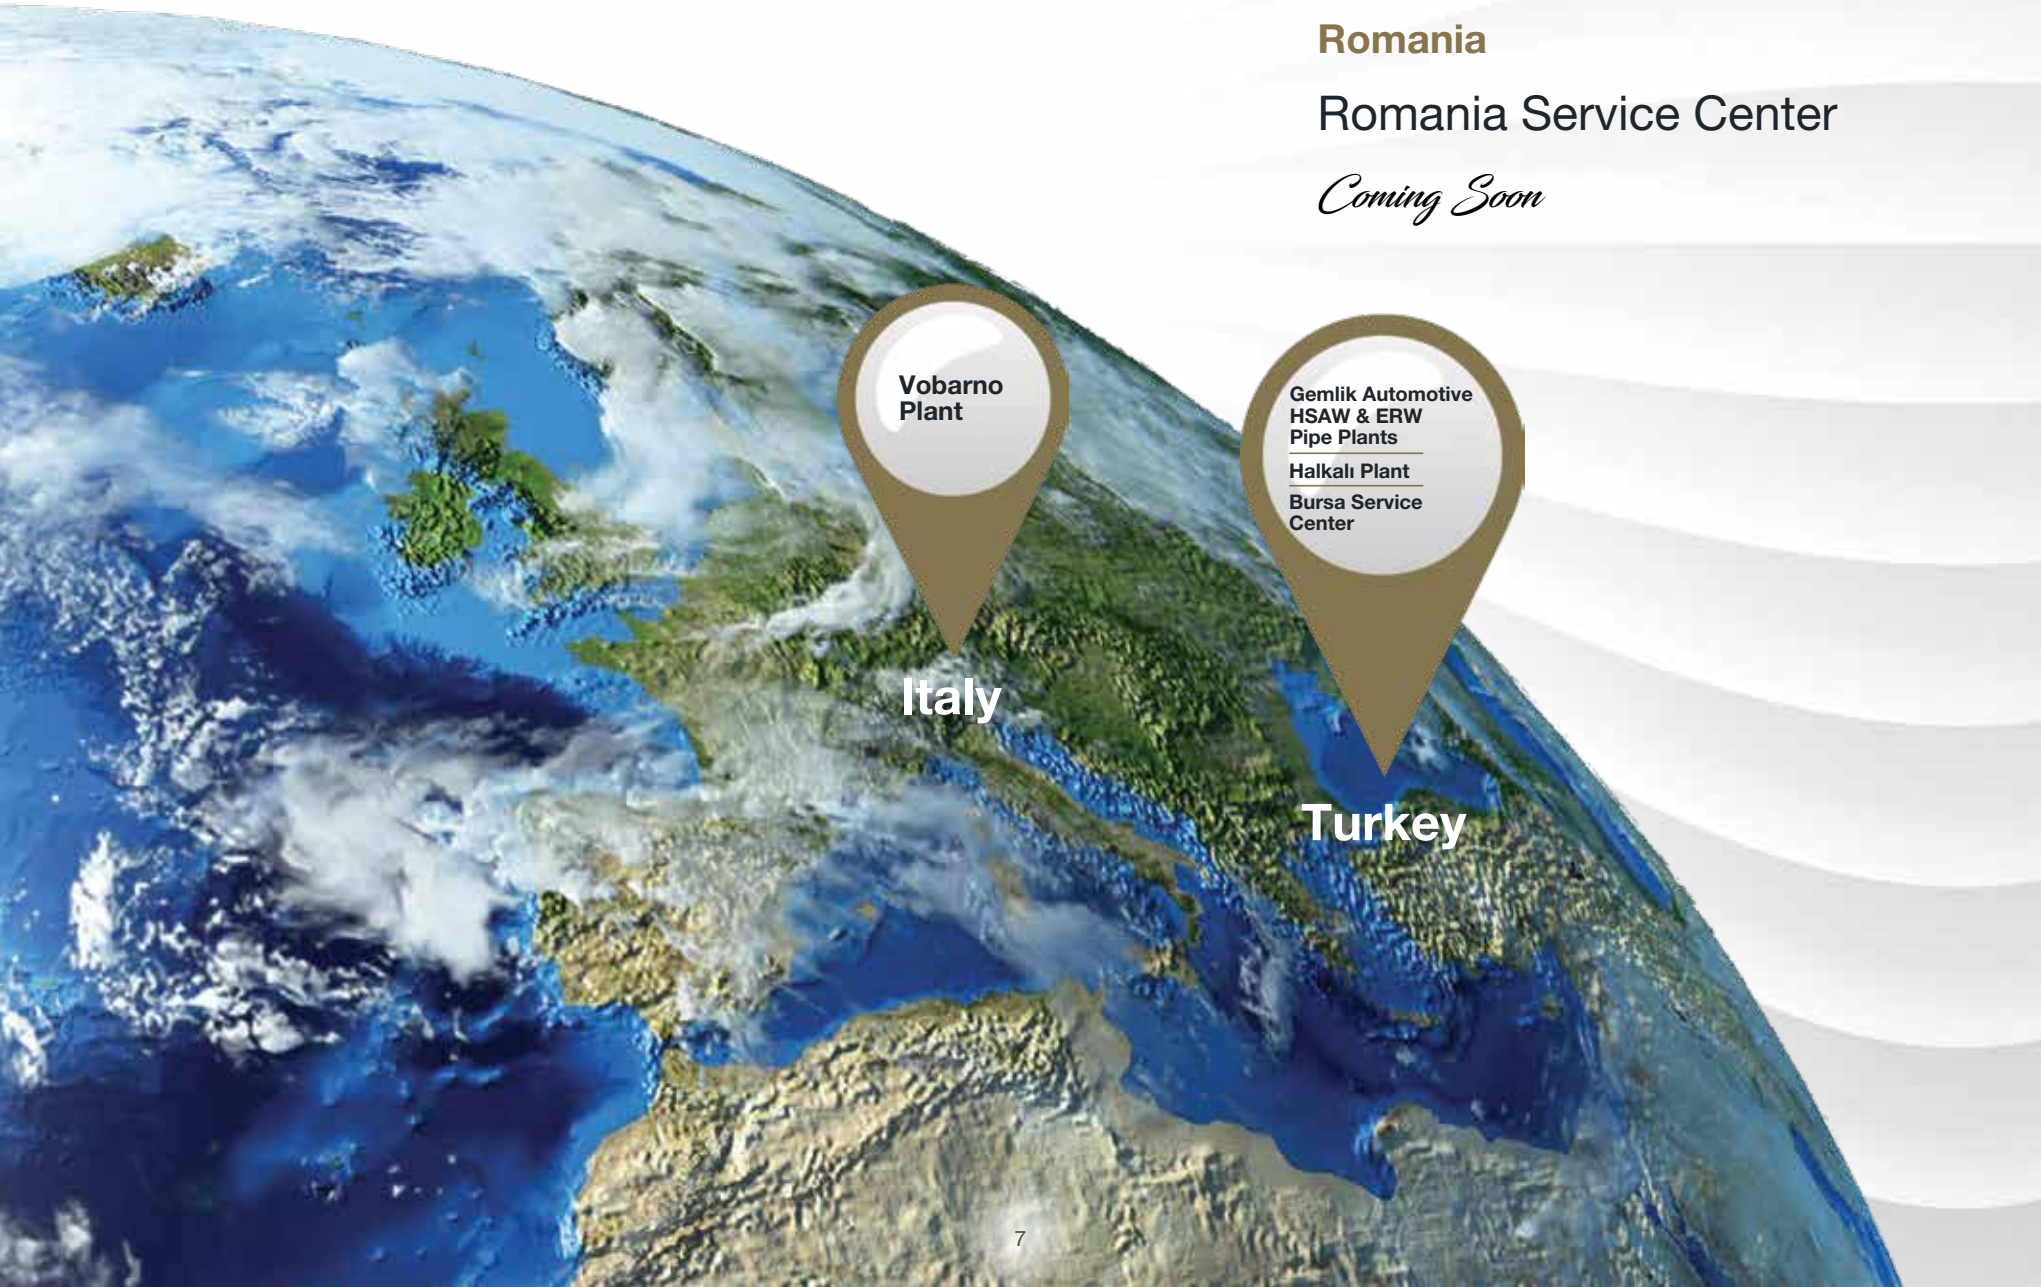

Vobarno Plant

Italy

Gemlik Automotive
HSAW & ERW
Pipe Plants
Halkalı Plant
Bursa Service Center

Turkey

SUSTAINABILITY AT BORUSAN HOLDING

Traceable Steps for Sustainable Future

Borusan Group regards the concept of sustainability the cornerstone of its business processes, treating environmental, social and economic aspects of sustainability as a whole.

Updating its sustainability efforts in a much more inclusive way in 2020, Borusan carries out integrative studies in the focus areas of climate, human and innovation. While it is aimed to be carbon neutral in 2030, to reduce water consumption in the focus of climate throughout the Group, it is desired to support terrestrial life while creating a clean and renewable energy portfolio.

As a corporation prominent with its ethical values, Borusan has paid attention to sustainability principles when preparing the strategic plan for the next 5 years. Its investments and programs are designed in line with this mentality. Investments in renewable energy shine out as a role model for reflecting Borusan's Groups sustainability philosophy on business strategies.



In 2006, Borusan Holding signed the United Nations (UN) Global Compact consisting of 10 articles on human rights, labor standards, environmental protection and anti-corruption. As a result of this initiative of the UN which was commenced in 1999 with the participation of 1,300 corporations from all over the world so far, Borusan set its course to follow as “Borusan's Path” and secured it under corporate commitment.



In 2010, Borusan Holding joined the “World Business Council for Sustainable Development” as the 2nd member from Turkey.

Drawn up on the basis of GRI's globally recognized Sustainability Reporting Guidelines, the first Borusan Sustainability Report was published in 2009. In December, the report was deemed “Notable”, in other words, exceptionally successful and satisfactory at the UN standards, by New York based Global Compact Center of the United Nations. Borusan continues publishing progress reports on a constant basis.



SUSTAINABILITY AT BORUSAN MANNESMANN

For Our World

Throughout its operations, Borusan Mannesmann identifies strategies in order to minimize its footprint on the environment and follows environment-friendly policies for a clean environment and healthy future. It operates in accordance with all national and international regulations with a view to recycling its waste, minimizing its use of natural resources, passing on a healthy environment to the posterity.



Borusan Mannesmann regularly reports its sustainability work under the Borusan Group umbrella. Accordingly, the first Borusan Sustainability Report based on the globally recognized GRI Sustainability Guidelines, was published in 2009. And in December, it was found “Notable”, or exceptionally successful and sufficient based on UN standards by the United Nations’ Global Compact Center in New York City.



Borusan Mannesmann also produces environment-friendly projects together with Borusan Ocean Volunteers Platform, which helps us share with the society our corporate and individual knowledge, skills and know-how, and take part in joint projects with various NGOs.



CUSTOMER BENEFITS

Exceeding Limits with Continuous R&D

Borusan Mannesmann's research and development philosophy enables us to carry out research activities in all markets and develop new products for our customer's and market needs. As Borusan Mannesmann; we also conduct joint projects together with our raw material suppliers in developing special material qualities for the manufacture of desired product. We collaborate in performing trial productions and troubleshooting activities to maintain excellence in product and process design and implementation to the best possible extent.

As a company that embraces Lean 6 Sigma methodology; launching breakthrough technologies, improving production and process control steps, is a part of our daily life.



Integrated Delivery Services

Challenging the dynamics of global competition, Borusan Mannesmann gets the maximum benefits from the location advantage of its plants. Borusan Mannesmann's state of the art Houston Plant has direct rail and barge accesses with dedicated trucks. Also owned solely by Borusan Group, Borusan Port in Gemlik location is one of Europe's most important ports in terms of both size and location. Its physical conditions and Equipment Park enables Borusan Port to serve container and bulk vessels at the same time with the capacity to handle 5 million tons of cargo, 250.000 vehicles and 400.000 TEU containers.

Borusan Mannesmann regularly provides shipping to many different destinations in the world - an ability, which gives the company a certain edge on transportation by sea. Borusan Logistics is our delivery partner that provides services of chartering and project transportation, as well as international bulk, container, land, railway and air transportation. As a solution partner with its reliable services and tracking systems in international transportation, Borusan Logistics creates value for us in terms of our "port to door" deliveries.

Turnkey Synergetic Solutions

Our customers are assured that all of our products meet their expectations varying from internationally recognized specifications to special requirements. Borusan Mannesmann provides turnkey products either with its modern integrated facilities or reliable processing suppliers, for its customers.



VOC - Most Valuable Driving Force

Borusan Mannesmann has been capturing the requirements and feedback of our customers to provide the best product and service quality. We have been applying the VOC - Voice of Customer process since 2003. Serving to our customers and delivering synergetic solutions in the most cost effective way is a consistent discipline in Borusan Mannesmann. We aim to compose personal recipes for special market needs. This approach leads us to go beyond ourselves and present valuable services for our customers.

Well Established Sales Organization

Borusan Mannesmann's sales experts provide fast response and reliable technical consultation in close cooperation with our customers before and after the sales process. Our sales organization is made of professional local representatives who speak our customer's language in their market and always provide the best solutions for the business. Company's representatives are carefully picked from the best of highly qualified distributors in the local market. We provide the best solutions; in your country, in your language with equipped people.



OUR TEAM

There is no limit of the human potential. Success brings the desire to achieve more. Having a principle of 'being one step ahead', our talented workforce is dedicated to achieve a high level of customer service. Our sales organization consists of the experts of their fields, both in planning, sales and trade operations. The educational and developmental programs which will create a significant difference for Borusan members in means of business processes and personal development are designed by the Borusan Academy. The Leadership and Sales Faculty programs are jointly offered with the assistance of Sabanci University, Executive Development Unit. They consist of various certification programs which include long-term postgraduate level education and development topics prepared by locally and internationally renowned experts in their fields.



QEHS Management

Borusan Group companies all share a common set of guiding principles, which help this vast enterprise to operate in complete harmony. These principles are commitments to productivity, innovation and environmental responsibility.

From raw material to finished product, Borusan Mannesmann determines the impacts on environment and in order to reduce impacts, controls each step of the process. Our Environmental Management System certificate (ISO 14001) proves our commitment to environment.

Healthy performance is delivered through healthy people. In compliance with ISO 45001, Borusan Mannesmann endeavors to protect health and safety of its work force and service providers.

Borusan Mannesmann; exemplary with its modern management approach as well as its investments, has been applying The Lean Six Sigma methodology since 2002 and Voice of Customer (VOC) process since 2003.

The Lean Six Sigma methodology is a highly disciplined business management strategy that seeks to remove the causes of defects in production and business processes, and to continuously improve productivity, profitability and customer satisfaction. Besides with the VOC process, we capture the requirements and feedback from our customers to provide the best product and service quality.

Ongoing efforts to improve customer satisfaction brought Borusan Mannesmann, Complaints Handling Management Systems Certificate (ISO 10002); which is a first in steel pipe sector globally.





ENERGY



OCTG-CASING AND TUBING

Sizes

Outside Diameter	Wall Thickness	Length
26,7 mm - 339,7 mm	2,87 mm - 13,06 mm	6,00 m - 18,30 m
1.050" - 13.375"	0.113" - 0.514"	19,68 ft - 60,04 ft

Production Standards & Material Qualities

- API 5CT certified for threaded and coupled casing and tubing (According to API 5B)
- Full ERW grade range: H40, J55/K55, L80, N80, FBNAU, P110 and Q125
- Proprietary as rolled 80, 90 grade available
- Enhanced high collapse versions of L80 and P110 grades available



Tests & Certificates

- API 5CT
- Visual and dimensional inspection
- Mechanical Tests: Tensile, Flattening, Expanding
- Steady scarfing with 100% weldline ultrasonic testing
- Hydrotesting in place of 100%
- Consistent wall thickness with oversize drift options available
- Reduced tolerances through statistical process control
- Uniform concentricity, roundness, straightness and cylindricity
- Fully normalized weld zones
- NDT Standards: U/S (ASTM E 213 Level 3)
- Suitable for directional drilling and multiple fracturing operations
- Accredited lab tests and third party inspections available (full body and weld line UT, EMI, SEA)

Finishing Operations

- Plain end square cut or high quality API 5B certified threading and coupling
- Premium and semi-premium threads available
- High quality threaded compound, couplings and protectors
- Torque controlled coupling application
- External corrosion prevention with durable and environmentally safe coating



Tubing - Production Range

	Range 1	Range 2	Range 3
(ft)	20.0 - 24.0	28.0 - 32.0	38.0 - 42.0

Labels

Nominal linear mass shown for information and assistance in ordering only (T&C: threaded and coupled)

OD (inch)	Non-Upset T&C Nominal Linear mass (lb/ft)	External Upset T&C Nominal Linear mass (lb/ft)	Wall Thickness (inch)
1.050	1.14	1.20	0.113
1.050	1.48	1.54	0.154
1.315	1.70	1.80	0.133
1.315	2.19	2.24	0.179
1.660	2.09	-	0.125
1.660	2.30	2.40	0.140
1.660	3.03	3.07	0.191
1.900	2.40	-	0.125
1.900	2.75	2.90	0.145
1.900	3.65	3.73	0.200
1.900	4.42	-	0.250
1.900	5.15	-	0.300
2.063	3.24	-	0.156
2.063	4.50	-	0.225
2.375	4.00	-	0.167
2.375	4.60	4.70	0.190
2.375	5.80	5.95	0.254
2.375	6.60	-	0.295
2.375	7.35	7.45	0.336
2.875	6.40	6.50	0.217
2.875	7.80	7.90	0.276
2.875	8.60	8.70	0.308
2.875	9.35	9.45	0.340
2.875	10.50	-	0.392
3.500	7.70	-	0.216
3.500	9.20	9.30	0.254
3.500	10.20	-	0.289
3.500	12.70	12.95	0.375
4.000	9.50	-	0.226
4.000	10.70	11.00	0.262
4.500	12.60	12.75	0.271
4.500	15.20	-	0.337

API 5CT Tubing grades: J55, J55N, N80Q, L80, P110, FBNAU



Casing - Production Range

Range Lengths:	Range 1	Range 2	Range 3	Extra long
(ft)	18.0 - 25.0	25.0 - 34.0 (95% 28ft min)	34.0 - 48.0 (95% 36ft min)	48.0 - 65.00

Labels

Nominal linear mass shown for information and assistance in ordering only (T&C: threaded and coupled)

OD (inch)	T&C Nominal linear mass (lb/ft)	Wall Thickness (inch)
4.5	9.50	0.205
4.5	10.50	0.224
4.5	11.60	0.250
4.5	13.50	0.290
4.5	15.10	0.337
4.5	16.60	0.375
4.5	18.90	0.430
4.5	21.50	0.500
5	11.50	0.220
5	13.00	0.253
5	15.00	0.296
5	18.00	0.362
5.5	14.00	0.244
5.5	15.50	0.275
5.5	17.00	0.304
5.5	20.00	0.361
5.5	23.00	0.415
5.5	26.00	0.476
5.5	26.80	0.500
5.5	29.70	0.562
6.00	24.1	0.400
6.625	24.00	0.352
6.625	28.00	0.417
6.625	32.00	0.475
6.625	35.00	0.525
7	17.00	0.231
7	20.00	0.272
7	23.00	0.317
7	26.00	0.362
7	29.00	0.408
7	32.00	0.453
7	35.00	0.498
7	38.00	0.540
7	41.00	0.590
7.625	24.00	0.300

OD (inch)	T&C Nominal linear mass (lb/ft)	Wall Thickness (inch)
7.625	26.40	0.328
7.625	29.70	0.375
7.625	33.70	0.430
7.625	39.00	0.500
7.625	42.80	0.562
7.625	45.30	0.595
8.625	24.00	0.264
8.625	28.00	0.304
8.625	32.00	0.352
8.625	36.00	0.400
8.625	40.00	0.450
8.625	44.00	0.500
9.625	32.30	0.312
9.625	36.00	0.352
9.625	40.00	0.395
9.625	43.50	0.435
9.625	47.00	0.472
9.625	53.50	0.545
9.625	58.40	0.595
10.75	32.75	0.279
10.75	40.50	0.350
10.75	45.50	0.400
10.75	51.00	0.450
10.75	55.50	0.495
10.75	60.70	0.545
10.75	65.70	0.595
11.75	42.00	0.333
11.75	47.00	0.375
11.75	54.00	0.435
11.75	60.00	0.489
13.375	48.00	0.330
13.375	54.50	0.380
13.375	61.00	0.430
13.375	68.00	0.480
13.375	72.00	0.514

Grades

- API 5CT: H40, J55, N80, L80, L80-D10, P110
 - API 5CT Monogrammed Proprietary: N80HC, L80HC, L80 EHC, P110 HC, P110 EHC, P110 HSCY
 - Proprietary (no API Monogram): B-80, B90, Borusan-K55HC, B-110CY,

- End finish options*: PE, STC, LTC, BTC, P110CY
 - Please contact our sales department for premium and semi-premium connections availability

ERW LINE PIPES

Sizes

Outside Diameter	Wall Thickness	Length
21,3 mm - 339,7 mm	2,8 mm - 12,7 mm*	6,00 m - 18,30 m
0.84" - 13.375"	0.109" - 0.500"	19,68 ft - 60,04 ft

*From US mill up to 15,88 mm available

Production Standards & Material Qualities

Line Pipe

API 5L, PSL 1, PSL 2 A, B, X42, X46, X52, X56, X60, X65, X70

CSA Z 245.1 Gr 241-Gr 359

EN ISO 3183 L245-L485 (N, M, NE, ME)

SI 530 Grade B



Tests & Certificates

- Visual and Dimensional Inspection
- Mechanical Tests:
Tensile, Flattening, Expanding, Bending
Weld Ductility, Fracture Toughness, PP, PE Testing
- Metallographic Examination
Purity Analysis
- Chemical Analysis
- Hydrostatic Test
- Non Destructive Inspection:
Eddy Current, Ultrasonic Test (Weld Check)
Ultrasonic (full body, optional)
- Mill Test Certificates
Acc. to EN 10204 2.1; 2.2; 3.1; 3.2
- NDT Standards
UT (EN ISO 10893-11 Level U2), ET (EN ISO 10893-2 Level E2), API, EN ISO 3183, CSA Z.245.1

Threading

114.3 mm ≤ OD ≤ 323.9 mm: API 5L
(Line Pipe according to API 5B)

Finishing Operations

Plain End-Square cut or bevelled / Zaplok
Black self colored / uncoated
Mill protective coating (black varnish) on outside surface
Epoxy lining and coating (AWWA C210), API RP5L2
3 Layer PE coating (DIN 30670, ISO 21809-1)
3 Layer PP coating (DIN 30678, ISO 21809-1)

Heat Treatment

21.3 mm ≤ OD ≤ 88.9 mm: full body
114.3 mm ≤ OD ≤ 323.9 mm: weld seam
21.3 mm ≤ OD < 219.1 mm: off-line heat treatment.

Production Range

OD	Wall Thickness (mm & inch)																							
	mm	2,8	3,0	3,2	3,6	3,68	3,7	4,0	4,5	5,1	5,2	6	6,6	7	7,1	8,1	8,4	8,6	9,0	9,5	10,0	11	12	12,7
mm	inch	0.109	0.113	0.133	0.140	0.145	0.147	0.154	0.179	0.200	0.203	0.237	0.258	0.277	0.280	0.318	0.331	0.337	0.354	0.375	0.394	0.432	0.472	0.500
21,3	1/2	1,28	1,35	1,43	1,57	1,60	1,61	1,71																
26,9	3/4	1,66	1,77	1,87	2,07	2,11	2,12	2,26	2,49															
33,7	1	2,13	2,27	2,41	2,67	2,72	2,74	2,93	3,24	3,60														
42,4	1 1/4	2,73	2,91	3,09	3,44	3,51	3,53	3,79	4,21	4,69	4,77													
48,3	1 1/2	3,14	3,35	3,56	3,97	4,05	4,07	4,37	4,86	5,43	5,53													
60,3	2 3/8	3,97	4,24	4,51	5,03	5,14	5,16	5,55	6,19	6,94	7,07													
73	2 7/8	4,85	5,18	5,51	6,16	6,29	6,32	6,81	7,60	8,54	8,69	9,91	10,81	11,39	11,54									
88,9	3 1/2	5,95	6,35	6,76	7,57	7,73	7,77	8,37	9,37	10,54	10,73	12,27	13,39	14,14	14,32									
114,3	4 1/2		8,23	8,77	9,83	10,04	10,09	10,88	12,18	13,73	13,99	16,02	17,53	18,52	18,77	21,21	21,94	22,42	23,37	24,55				
141,3	5 9/16		10,23	10,90	12,22	12,49	12,55	13,54	15,18	17,13	17,45	20,02	21,92	23,18	23,50	26,61	27,53	28,14	29,36	30,88	32,38			
168,3	6 5/8			13,03	14,62	14,94	15,02	16,21	18,18	20,53	20,91	24,01	26,32	27,84	28,22	32,00	33,12	33,87	35,36	37,20	39,04	42,67		
219,1	8 5/8				19,13	19,55	19,65	21,22	23,81	26,91	27,43	31,53	34,59	36,61	37,12	42,15	43,65	44,64	46,63	49,10	51,56	56,45	61,29	64,64
273	10 3/4							26,53	29,80	33,69	34,34	39,51	43,36	45,92	46,56	52,91	54,81	56,07	58,59	61,73	64,86	71,07	77,24	81,52
323,9	12 3/4							31,55	35,44	40,09	40,87	47,04	51,64	54,70	55,47	63,08	65,35	66,87	69,89	73,65	77,41	84,88	92,30	97,46
339,7	13 3/8								37,20	42,08	42,89	49,37	54,21	57,43	58,23	66,24	68,63	70,22	73,40	77,36	81,30	89,16	96,97	102,41

SPIRALLY WELDED LINE PIPES

Sizes

Outside Diameter	Wall Thickness	Length
508 mm - 3.048 mm	4,78 mm - 25,4 mm	Single lengths up to 24,50 m*

* For piling pipes single lengths up to 55 m

Production Standards & Material Qualities

API 5L
ISO 3183

PSL1 - PSL2 GRA - X80 (N, M)
L555 - X80 (N, M, ME)

CSA Z245.1 : Requirement of category I, II, III



Coating Standards

- Abrasion Resistant Overlay (ARO) OD Coating: API 5L7, CSA Z245.20, NACE RP 0394, AWWA C213
- FBE (Fusion Bonded Epoxy) OD Coating: API 5L7, CSA Z245.20, NACE RP 0394, AWWA C213
- Polyethylene OD Coating: DIN 30670, TS 5139, NF A 49-710, UNI 9099, EN ISO 21809-1
- Polypropylene OD Coating: DIN 30678, NF A 49-711, EN ISO 21809-1
- Flowcoat Epoxy ID Coating: API RP 5L2, EN 10301
- Solvent Free Epoxy (SFE) ID Coating: AWWA C 210
- Glass fibre reinforced plastic GRP OD Coating

Quality Certificates

- API 5L
- API Q1
- ISO9001
- ISO14001
- ISO45001
- EN ISO/IEC 17025
- EN ISO 3183

Production Range

OD	Wall Thickness (mm & inch)																									
	mm	inch	4,78	5,16	5,56	6,35	7,14	7,92	8,74	9,52	10,31	11,13	11,91	12,70	13,49	14,27	15,00	16,66	17,48	18,26	19,05	20,62	22,23	23,83	25,40	
508	20																									
559	22																									
610	24																									
660	26																									
711	28																									
762	30																									
813	32																									
864	34																									
914	36																									
965	38																									
1.016	40																									
1.067	42																									
1.118	44																									
1.168	46																									
1.219	48																									
1.270	50																									
1.321	52																									
1.372	54																									
1.422	56																									
1.524	60																									
1.626	64																									
1.676	66																									
1.727	68																									
1.829	72																									
2.032	80																									
2.083	82																									
2.235	88																									
2.540	100																									
2.794	110																									
3.048	120																									

up to 55 meter
 up to 24,5 meter
 Min. length 8 meters

TUBES FOR PRESSURE PURPOSE / BOILER TUBES

Sizes

Outside Diameter	Wall Thickness	Length
21,3 mm - 339,7 mm	2,0 mm - 12,7 mm	5,00 m - 18,30 m

Finishing Operations

- Plain End-Square cut or bevelled
- Black self colored/uncoated
- Surface protective coating (black varnished)

Production Standards & Material Qualities

ASTM A 178	GrA, GrC, GrD
EN 10217-1 (BS 3059 Part 1)	P195 TR1/TR2, P235 TR1/TR2, P265 TR1/TR2
EN 10217-2 (BS 3059 Part 2)	P195 GH, P235 GH, P265 GH
EN 10217-3	P355 N, P355 NH

Quality Certificates

AD-2000 WO, AD-2000 W4, PED

NDT Standards

UT (EN ISO 10893-11), ET (EN ISO 10893-2)



Tests & Certificates

- Visual and Dimensional Inspection
- Mechanical Tests:
 - Tensile Test, Flattening Test, Flaring Test
 - Expanding Test
- Metallographic Examination
- Chemical Analysis
- Hydrostatic Test
- Non Destructive Inspection:
 - In-Line Ultrasonic (weld check)
 - Eddy Current
- Mill Test Certificates
Acc. to EN 10204 2.1; 2.2; 3.1; 3.2
PED Certified-Pressure Equipment Directive 2014/68/eu Certified

Production Range

OD mm	Wall Thickness (mm)																										
	2,0	2,3	2,7	2,9	3,0	3,2	3,4	3,6	3,8	4,0	4,2	4,5	4,7	5,0	5,2	5,4	5,5	6,0	6,5	7,0	7,5	8,0	8,5	9,0	9,5	10,0	
21,3																											
21,3<D<23																											
23,0																											
23,0<D<25,0																											
25,0																											
25,0<D<26,9																											
26,9																											
26,9<D<28,0																											
28,0																											
28,0<D<30,0																											
30,0																											
30,0<D<32,0																											
32,0																											
32,0<D<33,7																											
33,7																											
33,7<D<38,0																											
38,0																											
38,0<D<42,4																											
42,4																											
42,4<D<45,0																											
45,0																											
45,0<D<48,3																											
48,3																											
48,3<D<51,0																											
51,0																											
51,0<D<54,0																											
54,0																											
54,0<D<57,0																											
57,0																											
57,0<D<60,3																											
60,3																											
60,3<D<63,5																											
63,5																											
63,5<D<67,0																											
67,0																											
67,0<D<70,0																											
70,0																											
70,0<D<73,0																											
73,0																											
73,0<D<76,1																											
76,1																											
76,1<D<80,0																											
80,0																											
80,0<D<82,5																											
82,5																											
82,5<D<85,0																											
85,0																											
85,0<D<88,9																											
88,9																											

Please contact our sales department for tolerances.



WATER TRANSMISSION



ERW WATER PIPES

Sizes

Outside Diameter	Wall Thickness	Length
21,3 mm - 339,7 mm	2,0 mm - 12,7 mm	3,00 m - 18,30 m

Production Standards & Material Qualities

- Production Norms
EN 10224, EN 10255, ISO 65, ASTM A 53, ASTM A 795, ASTM A 589
- Galvanizing Norms
EN 10240, EN ISO 1461 (BS 729), ASTM A 53, NFA 49-700, UNI 5745
- Production Standard For Threading and Coupling (1/2"-6")
ISO 7/1, ANSI B.1.20.1, EN 10255
- Grooving (3/4"-12") according to Victaulic Standard.
- Our medium series pipes can be used up to 25 bar operating pressure for water.
- Material Qualities
DIN 17100 St 37, St 44, St 52
EN 10025 S 195, S 235, S 275, S 355
Gr A, Gr B



Production Range (EN 10255)

Outside Diameter (mm)	Nominal Bore		Wall Thickness (mm)									
	(mm)	(inch)	2,0	2,3	2,6	2,9	3,2	3,6	4,0	4,5	5,0	5,4
21,3	15	1/2	L2	L/L1	M		H					
26,9	20	3/4		L2/L1/L	M		H					
33,7	25	1			L2	L/L1	M		H			
42,4	32	1 1/4			L2	L/L1	M		H			
48,3	40	1 1/2				L2/L/L1	M		H			
60,3	50	2				L2	L/L1	M		H		
76,1	65	2 1/2					L2/L/L1	M		H		
88,9	80	3					L2/L	L1	M		H	
114,3	100	4						L2/L	L1	M		H
139,7	125	5								L	M	H
165,1	150	6								L	M	H

H	Heavy Series
M	Medium Series
L	Light Series

Unit Weights for Black Plain End Pipes						
Outside Diameter (inch)	Outside Diameter (mm)	Unit Weights L Series (kg/mt)	Unit Weights L1 Series (kg/mt)	Unit Weights L2 Series (kg/mt)	Unit Weights M Series (kg/mt)	Unit Weights H Series (kg/mt)
1/2	21,30	1,08	1,08	0,95	1,21	1,44
3/4	26,90	1,40	1,39	1,38	1,56	1,87
1	33,70	2,20	2,20	1,98	2,41	2,93
1 1/4	42,40	2,82	2,82	2,54	3,10	3,79
1 1/2	48,30	3,25	3,24	3,23	3,56	4,37
2	60,30	4,51	4,49	4,08	5,03	6,19
2 1/2	76,10	5,75	5,73	5,71	6,42	7,93
3	88,90	6,76	7,55	6,72	8,36	10,30
4	114,30	9,83	10,80	9,75	12,20	14,50
5	139,70	15,00			16,60	17,90
6	165,10	17,80			19,80	21,30

Tests & Certificates

- Visual and Dimensional Inspection
- Leak tightness testing: Hydrostatic Test, Eddy Current Test
- Destructive Tests: Flattening, Bending
- Mechanical Tests
- Chemical Analysis
- Metallographic Examination
- Others as required by the standards
- Ultrasonic weld seam test if applicable for gas pipes
- Mill Test Certificates
 - Issued upon request according to EN 10204 2.1; 2.2; 3.1; 3.2
- NDT Standards:
 - ET (EN ISO 10893-2), ET (ASTM E309)

Finishing Operations

- Plain end (square cut or bevelled)
- Threaded and coupled (Max OD: 168.3 mm)
- Grooved
- Outside protective coating (black or red vanished), temporary oil application (Other colors are available upon request.)
- Hot dip galvanizing
- PE, PP Coating
- Bare Pipe (Uncoated)

A53/A53M -12

TABLE X2.2 Dimensions, Weights (Masses) per Unit Length, and Test Pressures for Plain-End Pipe

NPS Designator	DN Designator	Specified Outside Diameter, in (mm)	Specified Wall Thickness, in (mm)	Nominal Weight (Mass) per Unit Length, Plain End, lb/ft (kg/m)	Weight Class	Schedule No.	Test Pressure, psi (kPa)	
							Grade A	Grade B
1/2	15	0.840 (21.3)	0.109 (2.77)	0.85 (1.27)	STD	40	700 (4800)	700 (4800)
			0.147 (3.73)	1.09 (1.62)	XS	80	850 (5900)	850 (5900)
			0.188 (4.78)	1.31 (1.95)	...	160	900 (6200)	900 (6200)
			0.294 (7.47)	1.72 (2.55)	XXS	...	1000 (6900)	1000 (6900)
			0.308 (7.82)	2.44 (3.64)	1000 (6900)	1000 (6900)
3/4	20	1.050 (26.7)	0.113 (2.87)	1.13 (1.69)	STD	40	700 (4800)	700 (4800)
			0.154 (3.91)	1.48 (2.20)	XS	80	850 (5900)	850 (5900)
			0.219 (5.56)	1.95 (2.90)	...	160	950 (6500)	950 (6500)
			0.308 (7.82)	2.44 (3.64)	XXS	...	1000 (6900)	1000 (6900)
			0.358 (9.09)	3.66 (5.45)	1000 (6900)	1000 (6900)
1	25	1.315 (33.4)	0.133 (3.38)	1.68 (2.50)	STD	40	700 (4800)	700 (4800)
			0.179 (4.55)	2.17 (3.24)	XS	80	850 (5900)	850 (5900)
			0.250 (6.35)	2.85 (4.24)	...	160	950 (6500)	950 (6500)
			0.358 (9.09)	3.66 (5.45)	XXS	...	1000 (6900)	1000 (6900)
			0.382 (9.70)	5.22 (7.77)	1000 (6900)	1000 (6900)
1 1/4	32	1.660 (42.2)	0.140 (3.56)	2.27 (3.39)	STD	40	1200 (8300)	1300 (9000)
			0.191 (4.85)	3.00 (4.47)	XS	80	1800 (12400)	1900 (13000)
			0.250 (6.35)	3.77 (5.61)	...	160	1900 (13100)	2000 (13800)
			0.382 (9.70)	5.22 (7.77)	XXS	...	2200 (15200)	2300 (15900)
			0.438 (11.13)	7.47 (11.11)	2200 (15200)	2300 (15900)
1 1/2	40	1.900 (48.3)	0.145 (3.68)	2.72 (4.05)	STD	40	1200 (8300)	1300 (9000)
			0.200 (5.08)	3.63 (5.41)	XS	80	1800 (12400)	1900 (13100)
			0.281 (7.14)	4.86 (7.25)	...	160	1950 (13400)	2050 (14100)
			0.400 (10.16)	6.41 (9.56)	XXS	...	2200 (15200)	2300 (15900)
			0.438 (11.13)	7.47 (11.11)	2200 (15200)	2300 (15900)
2	50	2.375(60.3)	0.154 (3.91)	3.66 (5.44)	STD	40	2300 (15900)	2500 (17200)
			0.218 (5.54)	5.03 (7.48)	XS	80	2500 (17200)	2500 (17200)
			0.344 (8.74)	7.47 (11.11)	...	160	2500 (17200)	2500 (17200)
			0.436 (11.07)	9.04 (13.44)	XXS	...	2500 (17200)	2500 (17200)
			0.436 (11.07)	9.04 (13.44)	2500 (17200)	2500 (17200)
2 1/2	65	2.875 (73.0)	0.203 (5.16)	5.80 (8.63)	STD	40	2500 (17200)	2500 (17200)
			0.276 (7.01)	7.67 (11.41)	SXS	80	2500 (17200)	2500 (17200)
			0.375 (9.52)	10.02 (14.90)	...	160	2500 (17200)	2500 (17200)
			0.552 (14.02)	13.71 (20.39)	XXS	...	2500 (17200)	2500 (17200)
			0.552 (14.02)	13.71 (20.39)	2500 (17200)	2500 (17200)
3	80	3.500 (88.9)	0.125 (3.18)	4.51 (6.72)	1290 (8900)	1500 (1000)
			0.156 (3.96)	5.58 (8.29)	1600 (11000)	1870 (12900)
			0.188 (4.78)	6.66 (9.92)	1930 (13330)	2260 (15600)
			0.216 (5.49)	7.58 (11.29)	STD	40	2220 (15300)	2500 (17200)
			0.250 (6.35)	8.69 (12.93)	2500 (17200)	2500 (17200)
			0.281 (7.14)	9.67 (14.40)	2500 (17200)	2500 (17200)
			0.300 (7.62)	10.26 (15.27)	XS	80	2500 (17200)	2500 (17200)
			0.438 (11.13)	14.34 (21.35)	...	160	2500 (17200)	2500 (17200)
			0.600 (15.24)	18.60 (27.68)	XXS	...	2500 (17200)	2500 (17200)
			0.600 (15.24)	18.60 (27.68)	2500 (17200)	2500 (17200)
3 1/2	90	4.000 (101.6)	0.125 (3.18)	5.18 (7.72)	1120 (7700)	1310 (19000)
			0.156 (3.96)	6.41 (9.53)	1400 (6700)	1640 (11300)
			0.188 (4.78)	7.66 (11.41)	1690 (11700)	1970 (13600)
			0.226 (5.74)	9.12 (13.57)	STD	40	2030 (14000)	2370 (16300)
			0.250 (6.35)	10.02 (14.92)	2250 (15500)	2500 (17200)
			0.281(7.14)	11.17 (16.63)	2500 (17200)	2500 (17200)
			0.318 (8.08)	12.52 (18.63)	XS	80	2800 (19300)	2800 (19300)
4	100	4.500 (114.3)	0.125 (3.18)	5.85 (8.71)	1000 (6900)	1170 (8100)
			0.156 (3.96)	7.24 (10.78)	1250 (8600)	1460 (10100)
			0.188 (4.78)	8.67 (12.91)	1500 (10300)	1750 (12100)
			0.219 (5.56)	10.02 (14.91)	1750 (12100)	2040 (14100)
			0.237 (6.02)	10.80 (16.07)	STD	40	1900 (13100)	2210 (15200)
			0.250 (6.35)	11.36 (16.90)	2000 (13800)	2330 (16100)
			0.281 (7.14)	12.67 (18.87)	2250 (15100)	2620 (18100)
			0.312 (7.92)	13.97 (20.78)	2500 (17200)	2800 (19300)
			0.337 (8.56)	15.00 (22.32)	XS	80	2700 (18600)	2800 (19300)
			0.438 (11.13)	19.02 (28.32)	...	120	2800 (19300)	2800 (19300)
			0.531 (13.49)	22.53 (33.54)	...	160	2800 (19300)	2800 (19300)
			0.674(17.12)	27.57 (41.03)	XXS	...	2800 (19300)	2800 (19300)
			0.674(17.12)	27.57 (41.03)	2800 (19300)	2800 (19300)
5	125	5.563 (141.3)	0.156 (3.96)	9.02 (13.41)	1010 (7000)	1180 (8100)
			0.188 (4.78)	10.80 (16.09)	1220 (8400)	1420 (9800)
			0.219 (5.56)	12.51 (18.61)	1420 (9800)	1650 (11400)
			0.258 (6.55)	14.63 (21.77)	STD	40	1670 (11500)	1950 (13400)
			0.281 (7.14)	15.87 (23.62)	1820 (12500)	2120 (14600)
			0.312 (7.92)	17.51 (26.05)	2020 (13900)	2360 (16300)
			0.344 (8.74)	19.19 (28.57)	2230 (15400)	2600 (17900)
			0.375 (9.52)	20.80 (30.94)	XS	80	2430 (16800)	2800 (19300)
			0.500 (12.70)	27.06 (40.28)	...	120	2800 (19300)	2800 (19300)
			0.500 (12.70)	27.06 (40.28)	2800 (19300)	2800 (19300)

NPS Designator	DN Designator	Specified Outside Diameter, in (mm)	Specified Wall Thickness, in (mm)	Nominal Weight (Mass) per Unit Length, Plain End, lb/ft (kg/m)	Weight Class	Schedule No.	Test Pressure, psi (kPa)				
							Grade A	Grade B			
6	150	6.625 (168.3)	0.625 (15.88)	32.99 (49.11)	...	160	2800 (19300)	2800 (19300)			
			0.750 (19.05)	38.59 (57.43)	XXS	...	2800 (19300)	2800 (19300)			
			0.188 (4.78)	12.94 (19.27)	1020 (7000)	1190 (8200)			
			0.219 (5.56)	15.00 (22.31)	1190 (8200)	1390 (9600)			
			0.250 (6.35)	17.04 (25.36)	1360 (9400)	1580 (10900)			
			0.280 (7.11)	18.99 (28.26)	STD	40	1520 (10500)	1780 (12300)			
			0.312 (7.92)	21.06 (31.32)	1700 (11700)	1980 (13700)			
			0.344 (8.74)	23.10 (34.39)	1870 (12900)	2180 (15000)			
			0.375 (9.52)	25.05 (37.28)	2040 (14100)	2380 (16400)			
			0.432 (10.97)	28.60 (42.56)	XS	80	2350 (16200)	2740 (18900)			
			0.562 (14.27)	36.43 (54.20)	...	120	2800 (19300)	2800 (19300)			
			0.719 (18.26)	45.39 (67.56)	...	160	2800 (19300)	2800 (19300)			
			0.864 (21.95)	53.21 (79.22)	XXS	...	2800 (19300)	2800 (19300)			
			8	200	8.625 (219.1)	0.188 (4.78)	16.96 (25.26)	780 (5400)	920 (6300)
						0.203 (5.16)	18.28 (27.22)	850 (5900)	1000 (6900)
0.219 (5.56)	19.68 (29.28)	910 (6300)	1070 (7400)			
0.250 (6.35)	22.38 (33.31)	...				20	1040 (7200)	1220 (8400)			
0.277 (7.04)	24.72 (36.31)	...				30	1160 (7800)	1350 (9300)			
0.312 (7.92)	27.73 (41.24)	1300 (9000)	1520 (10500)			
0.322 (8.18)	28.58 (42.55)	STD				40	1340 (9200)	1570 (10800)			
0.344 (8.74)	30.45 (45.34)	1440 (9900)	1680 (11600)			
0.375 (9.52)	33.07 (49.20)	1570 (10800)	1830 (12600)			
0.406 (10.31)	35.67 (53.08)	...				60	1700 (11700)	2000 (13800)			
0.438 (11.13)	38.33 (57.08)	1830 (12600)	2130 (14700)			
0.500 (12.70)	43.43 (64.64)	XS				80	2090 (14400)	2430 (16800)			
0.594 (15.09)	51.00 (75.92)	...				100	2500 (17200)	2800 (19300)			
0.719 (18.26)	60.77 (90.44)	...				120	2800 (19300)	2800 (19300)			
0.812 (20.62)	67.82 (100.92)	...				140	2800 (19300)	2800 (19300)			
0.875 (22.22)	72.49 (107.88)	XXS				...	2800 (19300)	2800 (19300)			
0.906 (23.01)	74.76 (111.27)	...				160	2800 (19300)	2800 (19300)			
10	250	10.750 (273.0)				0.188 (4.78)	21.23 (31.62)	630 (4300)	730 (5000)
						0.203 (5.16)	22.89 (34.08)	680 (4700)	800 (5500)
						0.219 (5.56)	24.65 (36.67)	730 (5000)	860 (5900)
			0.250 (6.35)	28.06 (41.75)	...	20	840 (5800)	980 (6800)			
			0.279 (7.09)	31.23 (46.49)	930 (6400)	1090 (7500)			
			0.307 (7.80)	34.27 (51.01)	...	30	1030 (7100)	1200 (8300)			
			0.344 (8.74)	38.27 (56.96)	1150 (7900)	1340 (9200)			
			0.365 (9.27)	40.52 (60.29)	STD	40	1220 (8400)	1430 (9900)			
			0.438 (11.13)	48.28 (71.87)	1470 (10100)	1710 (11800)			
			0.500 (12.70)	54.79 (81.52)	XS	60	1670 (11500)	1950 (13400)			
			0.594 (15.09)	64.49 (95.97)	...	80	1990 (13700)	2320 (16000)			
			0.719 (18.26)	77.10 (114.70)	...	100	2410 (16600)	2800 (19300)			
			0.844 (21.44)	89.38 (133.00)	...	120	2800 (19300)	2800 (19300)			
			1.000 (25.40)	104.23 (155.09)	XXS	140	2800 (19300)	2800 (19300)			
			1.125 (28.57)	115.75 (172.21)	...	160	2800 (19300)	2800 (19300)			
			12	300	12.750 (323.8)	0.203 (5.16)	27.23 (40.55)	570 (3900)	670 (4600)
						0.219 (5.56)	29.34 (43.63)	620 (4300)	720 (5000)
						0.250 (6.35)	33.41 (49.71)	...	20	710 (4900)	820 (5700)
0.281 (7.14)	37.46 (55.75)	790 (5400)	930 (6400)			
0.312 (7.92)	41.48 (61.69)	880 (6100)	1030 (7100)			
0.330 (8.38)	43.81 (65.18)	...				30	930 (6400)	1090 (7500)			
0.344 (8.74)	45.62 (67.90)	970 (6700)	1130 (7800)			
0.375 (9.52)	49.61 (73.78)	STD				...	1060 (7300)	1240 (8500)			
0.406 (10.31)	53.57 (79.70)	...				40	1150 (7900)	1340 (9200)			
0.438 (11.13)	57.65 (85.82)	1240 (8500)	1440 (9900)			
0.500 (12.70)	65.48 (97.43)	XS				...	1410 (9700)	1650 (11400)			
0.562 (14.27)	73.22 (108.92)	...				60	1590 (11000)	1850 (12800)			
0.688 (17.48)	88.71 (132.04)	...				80	1940 (13400)	2270 (15700)			
0.844 (21.44)	107.42 (159.86)	...				100	2390 (16500)	2780 (19200)			
1.000 (25.40)	125.61 (186.91)	XXS				120	2800 (19300)	2800 (19300)			
1.125 (28.57)	139.81 (208.00)	...				140	2800 (19300)	2800 (19300)			
1.312 (33.32)	160.42 (238.68)	...				160	2800 (19300)	2800 (19300)			

A795/A795M

TABLE 1 Dimensions, Weights, and Test Pressure For Light -Weight Fire Protection Pipe- Schedule 10

NPS Designator	DN Designator	Outside Diameter		Nominal Wall Thickness		Weight Plain End		Furnace-Welded	Seamless and Electric-Resistance-Welded		
		in.	mm	in.	mm	lb/ft	kg/m	psi	kPa	kPa	kPa
3/4	20	1.050	(26.7)	0.083	(2.11)	0.86	(1.28)	500	(3400)	700	(4800)
1	25	1.315	(33.4)	0.109	(2.77)	1.41	(2.09)	500	(3400)	700	(4800)
1 1/4	32	1.660	(42.2)	0.109	(2.77)	1.81	(2.69)	500	(3400)	1000	(6900)
1 1/2	40	1.900	(48.3)	0.109	(2.77)	2.09	(3.11)	500	(3400)	1000	(6900)
2	50	2.375	(60.3)	0.109	(2.77)	2.64	(3.93)	500	(3400)	1000	(6900)
2 1/2	65	2.875	(73.0)	0.120	(3.05)	3.53	(5.26)	500	(3400)	1000	(6900)
3	80	3.500	(88.9)	0.120	(3.05)	4.34	(6.46)	500	(3400)	1000	(6900)
3 1/2	90	4.000	(101.6)	0.120	(3.05)	4.98	(7.41)	500	(3400)	1200	(8300)
4	100	4.500	(114.3)	0.120	(3.05)	5.62	(8.37)	500	(3400)	1200	(8300)
5	125	5.563	(141.3)	0.134	(3.40)	7.78	(11.58)	B	B	1200	(8300)
6	150	6.625	(168.3)	0.134	(3.40)	9.30	(13.85)	B	B	1000	(6900)
8	200	8.625	(219.1)	0.188C	(4.78)	16.96	(25.26)	B	B	800	(5500)
10	250	10.750	(273.1)	0.188C	(4.78)	21.23	(31.62)	B	B	700	(4800)

TABLE 2 Dimensions,Weights, Test Pressures For Standard-Weight Fire Protection Pipe -Schedule 30 and Schedule 40

NPS Designator	DN Designator	Specified Outside Diameter		Nominal Wall Thickness		Weight Plain End		Weight Threaded and Coupled		Furnace-Welded	Seamless and Electric-Resistance-Welded		
		in.	mm	in.	mm	lb/ft	kg/m	lb/ft	kg/m	psi	kPa	kPa	kPa
1/2	15	0.840	(21.3)	0.109	(2.77)	0.85	(1.27)	0.85	(1.27)	700	(4800)	700	(4800)
3/4	20	1.050	(26.7)	0.113	(2.87)	1.13	(1.69)	1.13	(1.68)	700	(4800)	700	(4800)
1	25	1.315	(33.4)	0.133	(3.38)	1.68	(2.50)	1.68	(2.50)	700	(4800)	700	(4800)
1 1/4	32	1.660	(42.2)	0.140	(3.56)	2.27	(3.39)	2.28	(3.40)	1000	(6900)	1000	(6900)
1 1/2	40	1.900	(48.3)	0.145	(3.68)	2.72	(4.05)	2.73	(4.07)	1000	(6900)	1000	(6900)
2	50	2.375	(60.3)	0.154	(3.91)	3.66	(5.45)	3.69	(5.50)	1000	(6900)	1000	(6900)
2 1/2	65	2.875	(73.0)	0.203	(5.16)	5.80	(8.64)	5.83	(8.68)	1000	(6900)	1000	(6900)
3	80	3.500	(88.9)	0.216	(5.49)	7.58	(11.29)	7.62	(11.35)	1000	(6900)	1000	(6900)
3 1/2	90	4.000	(101.6)	0.226	(5.74)	9.12	(13.58)	9.21	(13.71)	1200	(8300)	1200	(8300)
4	100	4.500	(114.3)	0.237	(6.02)	10.80	(16.09)	10.91	(16.25)	1200	(8300)	1200	(8300)
5	125	5.563	(141.3)	0.258	(6.55)	14.63	(21.79)	14.82	(22.07)	C	C	1200	(8300)
6	150	6.625	(168.3)	0.280	(7.11)	18.99	(28.29)	19.20	(28.60)	C	C	1200	(8300)
8	200	8.625	(219.1)	0.277A	(7.04)	24.72	(36.82)	25.57	(38.09)	C	C	1200	(8300)
10	250	10.750	(273.1)	0.307A	(7.80)	34.27	(51.05)	35.78	(53.29)	C	C	1000	(6900)

FIRE SPRINKLER PIPES - FIRESIST+

Sizes

Outside Diameter	Wall Thickness
21,3 mm – 323,9 mm	2,00 mm – 12,70 mm

Technical Specifications

- Superior epoxy coating up to 250 microns
- Corrosivity category C4-M certified
- DEKRA certified
- Available in Gray (RAL 7012)
- Roll grooved, Threaded & Coupled or Beveled pipe end
- Eliminates field painting
- Widest range of UL and FM approval, CE certified
- Produced according to ASTM and EN standards
- Pressure ratings exceeding 300 psi
- Size range between 1/2" -12"
- Reliable in all sizes
- Inner weld seam removal and custom length upon request
- Tight tolerances, consistent roundness and straightness



	OD (mm)	OD (inch)	Wall Thickness (mm)	Wall Thickness (inch)	Weight (kg/m)	Weight (lb/ft)	UL	FM
SCH 7	33,4	1"	2,00	0,079	1,55	1,04	✓	✓
	42,2	1 1/4"	2,00	0,079	1,98	1,33	✓	✓
	48,3	1 1/2"	2,13	0,084	2,42	1,62	✓	✓
	60,3	2"	2,13	0,084	3,05	2,05	✓	✓
	73	2 1/2"	2,18	0,086	3,80	2,55	✓	✓
	88,9	3"	2,36	0,093	5,04	3,38	✓	✓
	114,3	4"	2,60	0,108	7,16	4,81	✓	✓
141,3	5"	3,40	0,134	11,56	7,76	✓	✓	
SCH 10	26,7	3/4"	2,11	0,083	1,28	0,86	✓	✓
	33,4	1"	2,77	0,109	2,09	1,41	✓	✓
	42,2	1 1/4"	2,77	0,109	2,69	1,81	✓	✓
	48,3	1 1/2"	2,77	0,109	3,11	2,09	✓	✓
	60,3	2"	2,77	0,109	3,93	2,64	✓	✓
	73	2 1/2"	3,05	0,120	5,26	3,53	✓	✓
	88,9	3"	3,05	0,120	6,46	4,34	✓	✓
	101,6	3 1/2"	3,05	0,120	7,41	4,98	✓	✓
	114,3	4"	3,05	0,120	8,37	5,62	✓	✓
	141,3	5"	3,4	0,134	11,58	7,78	✓	✓
	168,3	6"	3,4	0,134	13,85	9,30	✓	✓
	219,1	8"	4,78	0,188	25,26	16,96	✓	✓
273,1	10"	4,78	0,188	31,62	21,23	✓	✓	
323,8	12"	4,78	0,188	37,61	25,28	✓	✓	
SCH 30	33,4	1"	2,90	0,114	2,18	1,46	✓	✓
	42,2	1 1/4"	2,97	0,117	2,87	1,93	✓	✓
	48,3	1 1/2"	3,18	0,125	3,53	2,37	✓	✓
	60,3	2"	3,18	0,125	4,48	3,00	✓	✓
	73	2 1/2"	4,78	0,188	8,04	5,40	✓	✓
	88,9	3"	4,78	0,188	9,92	6,65	✓	✓
	101,6	3 1/2"	4,78	0,188	11,41	7,65	✓	✓
	114,3	4"	4,78	0,188	12,91	8,66	✓	✓
	219,1	8"	7,04	0,277	36,82	24,72	✓	✓
273,1	10"	7,8	0,307	51,05	34,27	✓	✓	
SCH 40	21,3	1/2"	2,77	0,109	1,27	0,85	✓	✓
	26,7	3/4"	2,87	0,113	1,69	1,13	✓	✓
	33,4	1"	3,38	0,133	2,50	1,68	✓	✓
	42,2	1 1/4"	3,56	0,140	3,39	2,27	✓	✓
	48,3	1 1/2"	3,68	0,145	4,05	2,72	✓	✓
	60,3	2"	3,91	0,154	5,45	3,66	✓	✓
	73	2 1/2"	5,16	0,203	8,64	5,80	✓	✓
	88,9	3"	5,49	0,216	11,29	7,58	✓	✓
	101,6	3 1/2"	5,74	0,226	13,58	9,12	✓	✓
	114,3	4"	6,02	0,237	16,09	10,80	✓	✓
	141,3	5"	6,55	0,258	21,79	14,63	✓	✓
	168,3	6"	7,11	0,280	28,29	18,99	✓	✓
	219,1	8"	8,18	0,322	45,34	30,45	✓	✓
273,1	10"	9,27	0,365	60,29	40,52	✓	✓	
SCH 80	21,3	1/2"	3,73	0,147	1,62	1,09	✓	✓
	26,7	3/4"	3,91	0,154	2,20	1,48	✓	✓
	33,4	1"	4,55	0,179	3,25	2,19	✓	✓
	42,2	1 1/4"	4,85	0,191	4,49	3,03	✓	✓
	48,3	1 1/2"	5,08	0,200	5,39	3,65	✓	✓
	60,3	2"	5,54	0,218	7,55	5,08	✓	✓
	73	2 1/2"	7,01	0,276	11,52	7,75	✓	✓
	88,9	3"	7,62	0,300	15,39	10,35	✓	✓
	101,6	3 1/2"	8,08	0,318	18,82	12,67	✓	✓
	114,3	4"	8,56	0,337	22,60	15,20	✓	✓
	141,3	5"	9,52	0,375	31,42	21,04	✓	✓
	168,3	6"	10,97	0,432	43,05	28,88	✓	✓
	219,1	8"	12,70	0,500	65,41	44,00	✓	✓

EN UL & FM

	OD (mm)	OD (inch)	Wall Thickness (mm)	Wall Thickness (inch)	FM
Lightwall	33,7	1"	2,00	0,079	✓
	33,7	1"	2,60	0,102	✓
	42,4	1 1/4"	2,00	0,079	✓
	42,4	1 1/4"	2,30	0,091	✓
	42,4	1 1/4"	2,60	0,102	✓
	48,3	1 1/2"	2,00	0,079	✓
	48,3	1 1/2"	2,60	0,102	✓
	60,3	2"	2,00	0,079	✓
	60,3	2"	2,90	0,114	✓
	76,1	2 1/2"	2,18	0,086	✓
	76,1	2 1/2"	2,90	0,114	✓
	88,9	3"	2,36	0,093	✓
	88,9	3"	3,20	0,126	✓
	114,3	4"	2,60	0,102	✓
	114,3	4"	3,60	0,142	✓
139,7	5"	3,40	0,134	✓	

	OD (mm)	OD (inch)	Wall Thickness (mm)	Wall Thickness (inch)	FM	UL
EN10255 Medium	21,3	1/2"	2,6	0,102		
	26,9	3/4"	2,6	0,102		
	33,7	1"	3,2	0,126	✓	
	42,4	1 1/4"	3,2	0,126	✓	✓
	48,3	1 1/2"	3,2	0,126	✓	✓
	60,3	2"	3,6	0,142	✓	✓
	76,1	2 1/2"	3,6	0,142	✓	✓
	88,9	3"	4	0,157	✓	✓
	114,3	4"	4,5	0,177	✓	✓
	139,7	5"	5	0,197	✓	✓
	165,1	6"	5	0,197	✓	✓

EN UL & FM

	OD (mm)	OD (inch)	Wall Thickness (mm)	Wall Thickness (inch)	FM
EN10255 Heavy	21,3	1/2"	3,2	0,126	✓
	26,9	3/4"	3,2	0,126	✓
	33,7	1"	4	0,157	✓
	42,4	1 1/4"	4	0,157	✓
	48,3	1 1/2"	4	0,157	✓
	60,3	2"	4,5	0,177	✓
	76,1	2 1/2"	4,5	0,177	✓
	88,9	3"	5	0,197	✓
	114,3	4"	5,4	0,213	✓
	139,7	5"	5,4	0,213	✓
	165,1	6"	5,4	0,213	✓



FIRE SPRINKLER PIPES - FIRESIST®




Sizes

Outside Diameter	Wall Thickness
21,3 mm - 323,9 mm	2,00 mm - 12,70 mm

Technical Specifications

- FM approved
- UL/C-UL Listed
- NFS certified
- Tight tolerances
- Consistent wall thickness, straightness, roundness
- CE, PED certified
- Pressure tested
- Reliable high steel quality
- Galvanised sandblasted varnished coated black, red (RAL 3000, RAL 3002, RAL 3009) or grey (RAL 7012)
- Plain Ends, Grooved or Threaded & Coupled
- Custom length availability

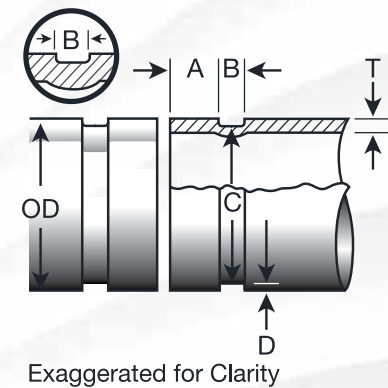

EN FM & UL

	OD (mm)	OD (inch)	Wall Thickness (mm)	Wall Thickness (inch)	FM
Lightwall	33,7	1"	2,00	0,079	✓
	33,7	1"	2,60	0,102	✓
	42,4	1 1/4"	2,00	0,079	✓
	42,4	1 1/4"	2,30	0,091	✓
	42,4	1 1/4"	2,60	0,102	✓
	48,3	1 1/2"	2,00	0,079	✓
	48,3	1 1/2"	2,60	0,102	✓
	60,3	2"	2,00	0,079	✓
	60,3	2"	2,90	0,114	✓
	76,1	2 1/2"	2,18	0,086	✓
	76,1	2 1/2"	2,90	0,114	✓
	88,9	3"	2,36	0,093	✓
	88,9	3"	3,20	0,126	✓
	114,3	4"	2,60	0,102	✓
	114,3	4"	3,60	0,142	✓
139,7	5"	3,40	0,134	✓	

	OD (mm)	OD (inch)	Wall Thickness (mm)	Wall Thickness (inch)	FM	UL
EN10255 Medium	21,3	1/2"	2,6	0,102		
	26,9	3/4"	2,6	0,102		
	33,7	1"	3,2	0,126	✓	
	42,4	1 1/4"	3,2	0,126	✓	✓
	48,3	1 1/2"	3,2	0,126	✓	✓
	60,3	2"	3,6	0,142	✓	✓
	76,1	2 1/2"	3,6	0,142	✓	✓
	88,9	3"	4	0,157	✓	✓
	114,3	4"	4,5	0,177	✓	✓
	139,7	5"	5	0,197	✓	✓
	165,1	6"	5	0,197	✓	✓

	OD (mm)	OD (inch)	Wall Thickness (mm)	Wall Thickness (inch)	FM
EN10255 Heavy	21,3	1/2"	3,2	0,126	✓
	26,9	3/4"	3,2	0,126	✓
	33,7	1"	4	0,157	✓
	42,4	1 1/4"	4	0,157	✓
	48,3	1 1/2"	4	0,157	✓
	60,3	2"	4,5	0,177	✓
	76,1	2 1/2"	4,5	0,177	✓
	88,9	3"	5	0,197	✓
	114,3	4"	5,4	0,213	✓
	139,7	5"	5,4	0,213	✓
	165,1	6"	5,4	0,213	✓

ASTM FM & UL

	OD (mm)	OD (inch)	Wall Thickness (mm)	Wall Thickness (inch)	Weight (kg/m)	Weight (lb/ft)	UL	FM
Easy Flow Light Wall	33,4	1"	2,60	0.102	1,99	1,34		✓
	42,2	1 1/4"	2,30	0.091	2,27	1,53		✓
	42,2	1 1/4"	2,60	0.102	2,55	1,71		✓
	48,3	1 1/2"	2,60	0.102	2,93	1,97		✓
	60,3	2"	2,90	0.114	4,1	2,76		✓
	73	2 1/2"	2,90	0.114	5,23	3,52		✓
	88,9	3"	3,20	0.126	6,76	4,54		✓
	114,3	4"	3,60	0.142	9,83	6,60		✓
141,3	5"	3,40	0.134	11,43	7,68		✓	
SCH 7	33,4	1"	2,00	0.079	1,55	1,04	✓	✓
	42,2	1 1/4"	2,00	0.079	1,98	1,33	✓	✓
	48,3	1 1/2"	2,13	0.084	2,42	1,62	✓	✓
	60,3	2"	2,13	0.084	3,05	2,05	✓	✓
	73	2 1/2"	2,18	0.086	3,80	2,55	✓	✓
	88,9	3"	2,36	0.093	5,04	3,38	✓	✓
	114,3	4"	2,60	0.108	7,16	4,81	✓	✓
	141,3	5"	3,40	0.134	11,56	7,76	✓	✓
SCH 10	26,7	3/4"	2,11	0.083	1,28	0,86	✓	✓
	33,4	1"	2,77	0.109	2,09	1,41	✓	✓
	42,2	1 1/4"	2,77	0.109	2,69	1,81	✓	✓
	48,3	1 1/2"	2,77	0.109	3,11	2,09	✓	✓
	60,3	2"	2,77	0.109	3,93	2,64	✓	✓
	73	2 1/2"	3,05	0.120	5,26	3,53	✓	✓
	88,9	3"	3,05	0.120	6,46	4,34	✓	✓
	101,6	3 1/2"	3,05	0.120	7,41	4,98	✓	✓
	114,3	4"	3,05	0.120	8,37	5,62	✓	✓
	141,3	5"	3,4	0.134	11,58	7,78	✓	✓
	168,3	6"	3,4	0.134	13,85	9,30	✓	✓
	219,1	8"	4,78	0.188	25,26	16,96	✓	✓
273,1	10"	4,78	0.188	31,62	21,23	✓	✓	
323,8	12"	4,78	0.188	37,61	25,28	✓	✓	
SCH 30	33,4	1"	2,90	0.114	2,18	1,46		✓
	42,2	1 1/4"	2,97	0.117	2,87	1,93		✓
	48,3	1 1/2"	3,18	0.125	3,53	2,37		✓
	60,3	2"	3,18	0.125	4,48	3,00		✓
	73	2 1/2"	4,78	0.188	8,04	5,40		✓
	88,9	3"	4,78	0.188	9,92	6,65		✓
	101,6	3 1/2"	4,78	0.188	11,41	7,65		✓
	114,3	4"	4,78	0.188	12,91	8,66		✓
	219,1	8"	7,04	0.277	36,82	24,72		✓
	273,1	10"	7,8	0.307	51,05	34,27		✓
SCH 40	21,3	1/2"	2,77	0.109	1,27	0,85	✓	✓
	26,7	3/4"	2,87	0.113	1,69	1,13	✓	✓
	33,4	1"	3,38	0.133	2,50	1,68	✓	✓
	42,2	1 1/4"	3,56	0.140	3,39	2,27	✓	✓
	48,3	1 1/2"	3,68	0.145	4,05	2,72	✓	✓
	60,3	2"	3,91	0.154	5,45	3,66	✓	✓
	73	2 1/2"	5,16	0.203	8,64	5,80	✓	✓
	88,9	3"	5,49	0.216	11,29	7,58	✓	✓
	101,6	3 1/2"	5,74	0.226	13,58	9,12	✓	✓
	114,3	4"	6,02	0.237	16,09	10,80	✓	✓
	141,3	5"	6,55	0.258	21,79	14,63	✓	✓
	168,3	6"	7,11	0.280	28,29	18,99	✓	✓
219,1	8"	8,18	0.322	45,34	30,45	✓	✓	
273,1	10"	9,27	0.365	60,29	40,52	✓	✓	
SCH 80	21,3	1/2"	3,73	0.147	1,62	1,09		✓
	26,7	3/4"	3,91	0.154	2,20	1,48		✓
	33,4	1"	4,55	0.179	3,25	2,19		✓
	42,2	1 1/4"	4,85	0.191	4,49	3,03		✓
	48,3	1 1/2"	5,08	0.200	5,39	3,65		✓
	60,3	2"	5,54	0.218	7,55	5,08		✓
	73	2 1/2"	7,01	0.276	11,52	7,75		✓
	88,9	3"	7,62	0.300	15,39	10,35		✓
	101,6	3 1/2"	8,08	0.318	18,82	12,67		✓
	114,3	4"	8,56	0.337	22,60	15,20		✓
	141,3	5"	9,52	0.375	31,42	21,04		✓
	168,3	6"	10,97	0.432	43,05	28,88		✓
219,1	8"	12,70	0.500	65,41	44,00		✓	

WATER WELL CASING PIPES

Sizes

Outside Diameter	Wall Thickness	Length
33,4 mm - 323,9 mm	3,2 mm - 9,5 mm	6,00 m - 18,30 m

Production Standards & Material Qualities

- ASTM A 589 Type I, II, III, IV Production Standard
- Reliable High Steel Quality
- From Grade A or Grade B Material Quality
- Weldable
- Threadable

Finishing Operations

- Threaded Option up to 6"
- Hot Dip Galvanised Option up to 6"

Tests & Certificates

- Visual and Dimensional Inspection
- Leak tightness testing: Hydrostatic Test, Eddy Current Test
- Destructive Tests: Flattening, Bending
- Mechanical Tests
- Chemical Analysis
- Metallographic Examination
- Others as required by the standards
- Mill Test Certificates
 - Issued upon request according to EN 10204 2.1; 2.2; 3.1; 3.2
- NDT Standards:
 - ET (EN ISO 10893-2), ET (ASTM E309)

Product Options

OD (inch)	OD (mm)	Wall Thickness (inch)	Wall Thickness (mm)
4 1/2"	114,3	0,237	6,02
5 1/2"	141,3	0,188	4,78
5 1/2"	141,3	0,258	6,55
6 5/8"	168,3	0,188	4,78
6 5/8"	168,3	0,219	5,56
6 5/8"	168,3	0,25	6,35
6 5/8"	168,3	0,28	7,11
8 5/8"	219,1	0,219	5,56
8 5/8"	219,1	0,25	6,35
8 5/8"	219,1	0,277	7,04
8 5/8"	219,1	0,322	8,18
10 3/4"	273	0,25	6,35
10 3/4"	273	0,279	7,09
10 3/4"	273	0,365	9,27
12 3/4"	323,8	0,25	6,35
12 3/4"	323,8	0,33	8,38
12 3/4"	323,8	0,375	9,52



SPIRALLY WELDED WATER LINE PIPES

Sizes

Outside Diameter	Wall Thickness	Length
508 mm - 3.048 mm	5,16 mm - 25,4 mm	Single lengths up to 24,50 m

Production Standards & Material Qualities

EN 10217-1	P195 - P265 TR1&TR2
EN 10224	L235 - L355
AWWA C 200	Grade 30 - Grade 50
UNI 6363	Fe 360 - Fe 510

*Production Range: See page 21

Coating Standards

- Dual Layer Abrasion Resistant FBE OD Coating: API 5L7, CSA Z 245-20, NACE RP 0394, AWWA C213
- FBE (Fusion Bonded Epoxy) OD Coating: API 5L7, CSA Z 245-20, NACE RP 0394, AWWA C213
- Polyethylene OD Coating: DIN 30670, TS 5139, NF A 49-710, UNI 9099, EN ISO 21809-1
- Polypropylene OD Coating: DIN 30678, NF A 49-711, EN ISO 21809-1
- Flow Coat Epox ID Coating: API RP 5L2, EN 10301
- Epoxy ID Coating: AWWA C 210
- Cement Mortar: AWWA C 205, DIN 2614, BS 534, EN 10298





CONSTRUCTION



CIRCULAR HOLLOW SECTIONS

Sizes

Circular Hollow Sections

Outside Diameter	Wall Thickness	Length
21,3 mm - 339,7 mm	2,0 mm - 12,7 mm	5,00 m - 12,0 m

Production Standards & Material Qualities

EN 10305-5	E 195, E 235, E 275, E 355
BS EN 10029	GR 43 C
ASTM A 500	GR A, GR B, GR C
EN 10219 (BS 6363)	S 235, S 275, S 355, S 460 MH, NH (J0H, JRH, J2H, K2H, GR 34/26, GR 43/36)



Tests & Certificates

- Visual and Dimensional Inspection
- Mechanical Tests:
 - Tensile Test
 - Flattening Test, Flaring Test
 - Expanding Test
 - Impact Test
- Metallographic Examination
- Chemical Analysis
- Non Destructive Inspection: In-Line Ultrasonic (weld check)
 - In-Line and offline Eddy Current (for round tubes)
- Mill Test Certificates
 - According to EN 10204 2.1; 2.2; 3.1; 3.2
- NDT Standards
 - ET (ISO 10893-2)
- Quality Certificates
 - EN 10219 - EN10210 CE marked

Finishing Operations

Plain End-Square cut or bevelled
Black, self-colored/uncoated

Mill protective oil coating; for both round, square and rectangular tubes, black varnish for outside surface of round tubes.



Production Range (EN 10219)

OD mm	Wall Thickness (mm)																			
	2,0	2,5	2,7	2,9	3,0	3,2	3,6	4,0	5,0	5,5	6,0	7,0	8,0	8,5	9,20	10,0	11,0	12,0	12,7	
21,3																				
25,0																				
26,9																				
32,0																				
33,7																				
38,0																				
42,4																				
48,3																				
51,0																				
57,0																				
60,3																				
63,5																				
70,0																				
73,0																				
76,1																				
82,5																				
88,9																				
101,6																				
114,3																				
127,0																				
133,0																				
139,7																				
141,3																				
159,0																				
165,1																				
168,3																				
177,8																				
219,1																				
244,5																				
273,0																				
323,9																				
339,7																				



SELF ANCHOR

Sizes

Outer Diameter	Wall Thickness
½" - 3"	Up to 10.00 mm
	Up to 10.00 mm

Production Standards

EN 10210
EN 10219-1



FOUNDATION / PILLING TUBES

Sizes

For Spirally Welded Pipes

Outside Diameter	Wall Thickness	Length
508 mm - 3.048 mm	5,16 mm - 25,4 mm	Single lengths up to 55,0 m

For ERW micro Pilling Pipes

Outside Diameter	Wall Thickness	Length
21,3 mm - 339,7 mm	2,8 mm - 12,7 mm	6,00 m - 18,30 m



Production Standards & Material Qualities

EN 10219-1	Grade including S355 J2H, S460 MH, S550 J2H
EN 10219-1	CE marking according to S355, S460 MH
ASTM A252	Grade including Grade 3
Inner weld bead removed	

Coating Standards

EN 12944 - 5

Most Common Piling Tube Sizes


Diameter (mm)	Wall Thickness (mm)	kg/meter
76,1	6,3	10,84
88,9	6,3	12,83
114,3	6,3	16,78
114,3	8	20,97
139,7	8	25,98
139,7	10	31,99
168,3	10	39,04
168,3	12,5	48,03
219,1	10	51,57
219,1	12,5	63,69
273,0	10	64,86
273,0	12,5	80,30
323,9	10	77,41
323,9	12,5	95,99

Chemical (max)	C	Mn	P	S	CEV%
S 460 MH	0,20%	1,70%	0,035%	0,03%	0,46%
S 550 J2H	0,16%	2,20%	0,03%	0,03%	0,47%

Mechanical	Yield Strength (Mpa) min	Tensile Strength (Mpa) min	Elongation min	Impact Energy -20°C
S 460 MH	460	530-720	17%	40 Joule
S 550 J2H	550	605-760	14%	27 Joule



ENGINEERING TECHNOLOGIES

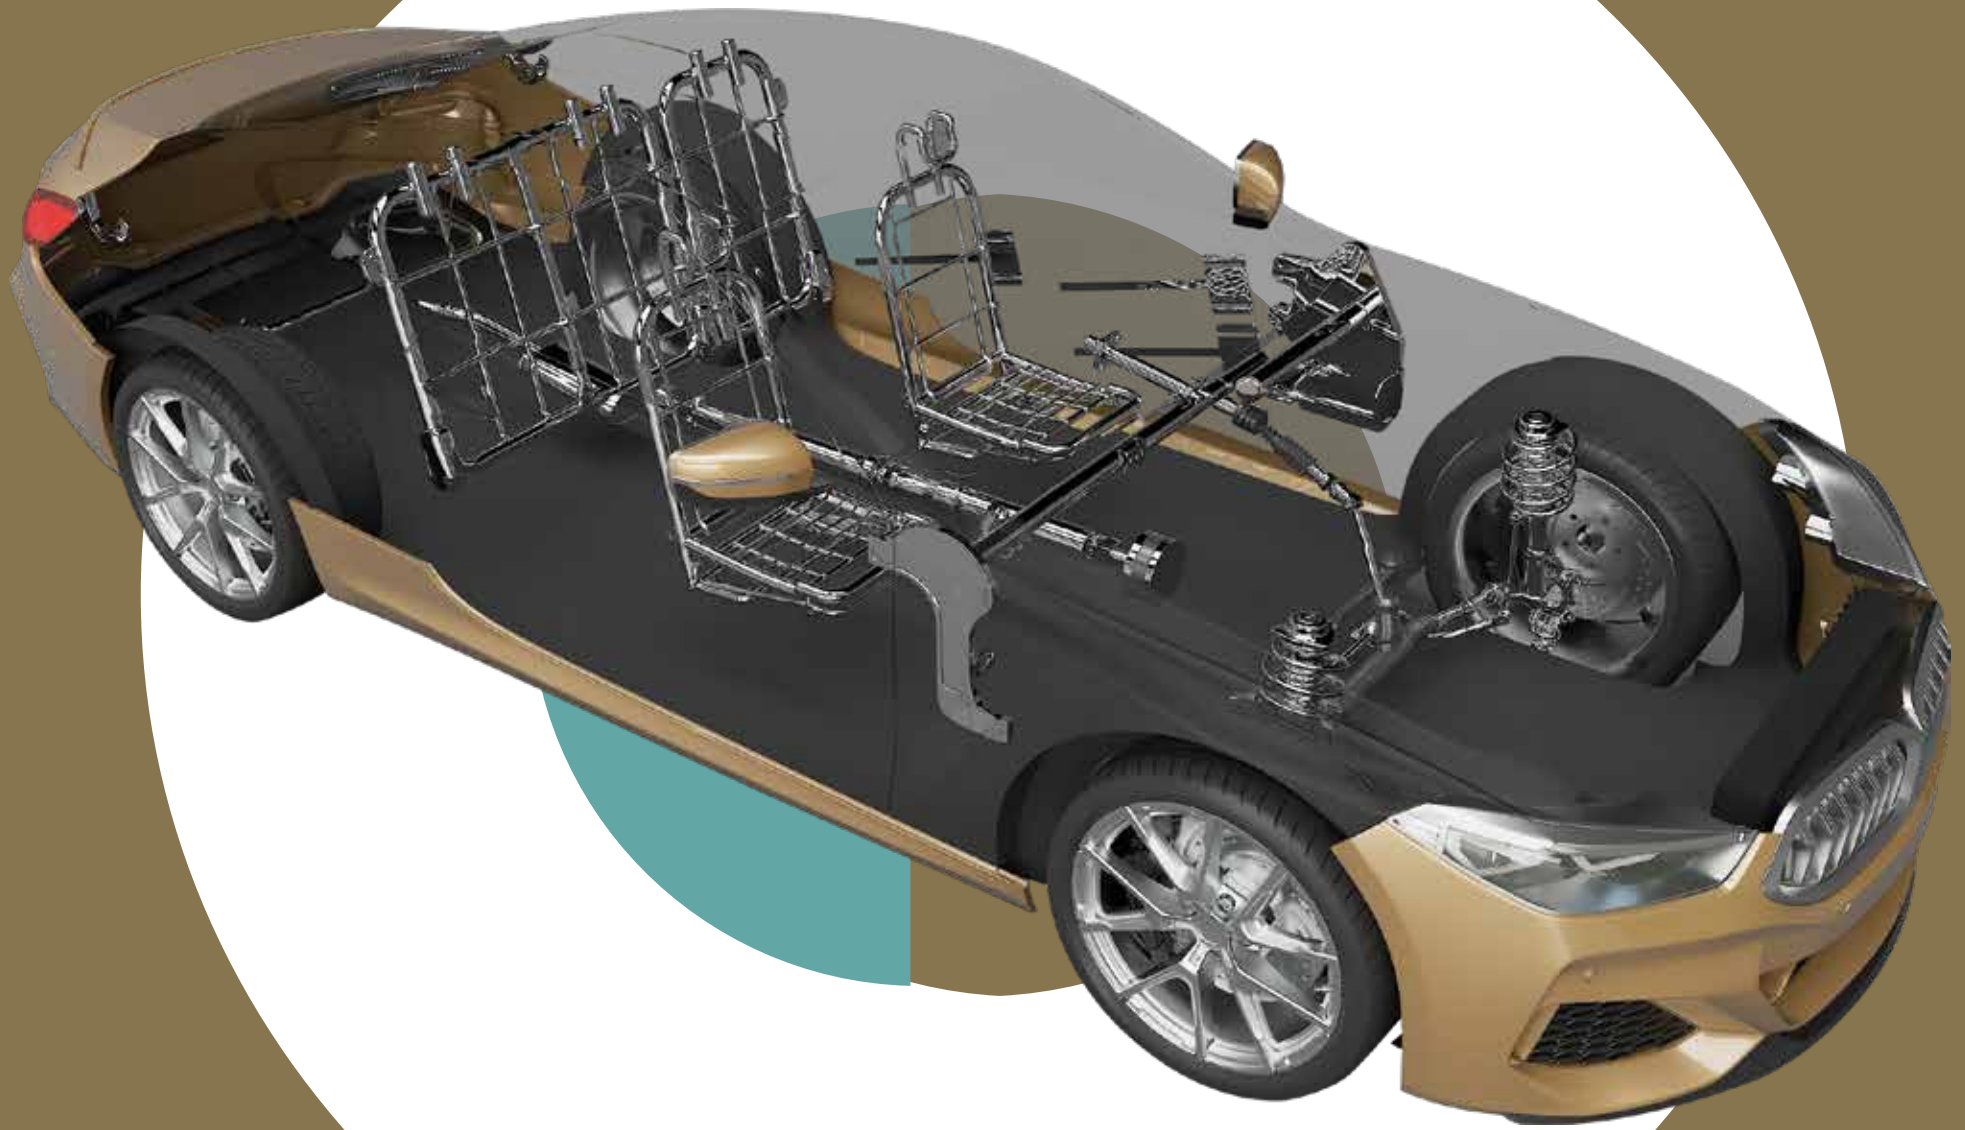

ENGINEERING TECHNOLOGIES

Production Standards

- Welded Cold Sized Tubes : EN 10305-3
- Welded Cold Drawn Tubes : EN 10305-2
- Welded Cold Sized Square and Rectangular Tubes : EN 10305-5

Note: Other standards such as ASTM A513, JIS G 3445 etc. upon request

Steel Grades

- Structural Steels : S235, S275, S355
- DQ Steels : DC01, DC03, DC04
- HSLA Steels : S315MC, S355MC, S420MC, S460MC, S500MC, S550MC, S600MC, S700MC
- Dual Phase Steels : DP500, DP600, DP800, DP1000
- Heat Treatable Steels : 20MnB5, 22MnB5, 26MnB5, 30MnB5, 34MnB5
- Coated (Galvanized, aluminized) Steels : DX51, DX52, DX53, S220, S350

Note: Other grades upon request



Tests & Inspections

- Visual Examination
- Dimensional Inspection
- Metallographic Inspection
- Tensile Test
- Drift Expanding / Flaring Test
- Flattening Test
- Hardness Testing (HV, HRB, HRC)
- Ultrasonic Testing
- Flanging Test
- Chemical Analysis
- Eddy Current Testing
- Surface Roughness Measurement

Inspection Documents

- MTC (Mill Test Certificates) acc. to EN 10204 3.1; 2.2

AUTOMOTIVE TUBES

Borusan Mannesmann is a highly recognized manufacturer for its product and service quality in automotive industry.


Our plants, one in Vobarno-Italy, one in Gemlik-Turkey and one in Halkalı-Turkey are specialized in production of value added precision tubes that are used in crucial parts of vehicles. Working together; our sales, quality and design teams manage all kinds of technical, schematic inquires and response our customers with custom made solutions. Products are commonly used in passenger cars, light and heavy commercial vehicles which are travelling around the globe.



**SHOCK
ABSORBER
TUBES**



**FRONT SEAT
FRAME TUBES**



STABILIZER




AXLE



**GAS
SPRING**



**CROSS CAR
BEAMS**




**STEERING
COLUMN
TUBES**



**TRUNK
HINGE**



**EXHAUST
TUBES**



**REAR SEAT
FRAME
TUBES**




**TIE
ROD
TUBES**



**CARDAN
SHAFT
TUBES**



**HEAD
REST
TUBES**



**DOOR
IMPACT
BEAMS**

HYDROLIC APPLICATION

Borusan Mannesmann's wide production range in precision business, enables company to serve in various kinds of industries ranging from hydraulic - pneumatic applications and drilling to mechanical applications. We are proud of being a preferred supplier of these industries for years with our delicate approach in meeting the most stringent customer requirements.



INDUSTRIAL APPLICATIONS CUSTOM SHAPED STEEL PROFILES

Borusan Mannesmann manufactures custom shaped profiles with the highest degree of functionality according to customer expectations.

Custom designed profiles are used in a variety of applications for different sectors such as automotive, construction, agricultural machinery, towel rails, furniture etc...

We supply profiles with most accurate tolerances to meet customers' requirements and drawings. Borusan Mannesmann has the knowledge to select the most suitable forming technologies to meet specific requirements.

TECHNOLOGIES FOR SPECIAL SHAPE PROFILES

- Direct Roll Forming
- HFW + Cold Forming
- Forming by Cold Drawing



We are ready to produce according to different type of standards and/or customers specialized technical requirements.

Steel grades, wall thickness, dimensions and tolerances may vary according requirements of final product. Different pre-coated raw materials and final coating methods are available upon request.

FURTHER PROCESSING

- Length Cutting
- Bending
- Hole Drilling
- Online Die Stamping

INSPECTION DOCUMENTS

- MTC (Mill Test Certificates) acc. to EN 10204 2.2, 3.1

TESTS & INSPECTIONS

- Visual Examination
- Dimensional Inspection
- Metallographic Inspection
- Tensile Test
- Chemical Analysis
- Flattening Test
- Hardness Testing (HV, HRB, HRC)
- Eddy Current Testing
- 3D Scanning



Welded Cold Sized Tubes for Precision Applications

OD mm	Wall Thickness (mm)																											
	0,70	1,00	1,20	1,50	1,70	2,00	2,20	2,50	2,80	3,00	3,30	3,50	4,00	4,50	5,00	5,50	6,00	6,50	7,00	7,50	8,00	8,50	9,00	9,50	10,00	10,50	11,00	
5																												
5,5																												
6																												
7																												
8																												
8,2																												
9																												
9,3																												
9,5																												
10																												
11																												
11,1																												
12																												
12,6																												
12,7																												
13																												
13,5																												
14																												
15																												
15,5																												
16																												
17																												
18																												
19																												
20																												
20,5																												
21																												
21,5																												
22																												
23																												
24																												
24,5																												
25																												
25,4																												
26																												
26,9																												
27,2																												
28																												
28,6																												
30																												
31,8																												
32																												
33,7																												
34																												
35																												
36																												
38																												
40																												
41																												
41,5																												
42																												
44																												
44,5																												
45																												
48																												
48,6																												
50																												
51																												
54																												
55																												
55,6																												
56,4																												
56,8																												
57																												
60																												
63,5																												
65																												
67																												
68																												
70																												
76																												
80																												
83																												
88,9																												
93																												

Welded Cold Sized Tubes (EN 10305-3)

Delivery Conditions:

BKM (+CR1 ve + CR2) = Standard

NBK (+N) = Normalized

GBK (+A) = Annealed

Steel Grades: St 14, St 13, St 12, St 34, St 37, St 44, St 52

(E155) (E195) (E235) (E275) (E355)

Welded Cold Drawn Tubes for Precision Applications

OD mm	Wall Thickness (mm)																									
	0,9	1	1,25	1,5	1,75	2	2,25	2,5	2,75	3	3,25	3,5	4	4,25	4,5	5	5,5	6	6,5	7	7,5	8	8,5	9	10	
15																										
16 - 17																										
18 - 19																										
20 - 21																										
22 - 23																										
24 - 25																										
26 - 27																										
28 - 30																										
31 - 33																										
34 - 36																										
37 - 39																										
40 - 44																										
45 - 47																										
48 - 49																										
50 - 54																										
55 - 57																										
58 - 61																										
62 - 64																										
65 - 66																										
67 - 69																										
70 - 72																										
73 - 74																										
75 - 77																										
78 - 83																										
84 - 87																										
88 - 89																										
90 - 91																										
92 - 96																										
97 - 100																										
101 - 105																										
106 - 110																										
111 - 120																										
121 - 130																										

Cold Drawn Welded Steel Tubes (EN 10305-2)

Please contact our sales department for intermediate sizes.

Delivery Conditions:

+ C (BK) = Cold finished/hard

+ LC (BKW) = Cold finished/soft

+ N (NBK) = Normalized

+ SR (BKS) = Cold finished and stress relieved

+ A (GBK) = Annealed

Standard Norms: TS EN 10305-2, UNI 7946, BS 6323 Part 6, NFA 49-341, ASTM A 513

Steel Grades mainly used: RSt 34-2, RSt 37-2, St 44-2, St 52-3

(E 195) (E 235) (E 275) (E 355)

ASTM A 513 Mechanical Tubing (Type V-VI)

OD (inch)	Wall Thickness (inch)																											
	0.035	0.049	0.058	0.065	0.083	0.095	0.109	0.120	0.125	0.134	0.156	0.165	0.180	0.188	0.207	0.219	0.238	0.250	0.281	0.284	0.313	0.344	0.375	0.406				
0.625																												
0.688																												
0.750																												
0.813																												
0.875																												
0.938																												
1.000																												
1.063																												
1.125																												
1.188																												
1.250																												
1.313																												
1.375																												
1.500																												
1.563																												
1.625																												
1.688																												
1.750																												
1.768																												
1.875																												
2.000																												
2.125																												
2.250																												
2.375																												
2.438																												
2.500																												
2.563																												
2.625																												
2.750																												
2.875																												
3.000																												
3.063																												
3.125																												
3.250																												
3.375																												
3.500																												
3.555																												
3.625																												
3.688																												
3.750																												
3.875																												
4.000																												
4.022																												
4.062																												
4.095																												
4.125																												
4.250																												
4.375																												
4.500																												
4.562																												
4.593																												
4.625																												
4.750																												
5.000																												
5.125																												

Delivery Conditions: M.D., S.S.I.D.
M.D.: Mandrel Drawn
S.S.I.D.: Special Smooth Inside Diameter
Standard Norms Supplied: ASTM A 513
Steel Grades Mainly Used: 1008-1040

Please contact our sales department for any inquiries.

Welded Hollow Sections for Precision Applications (EN 10305-5)

Side Length b x h (mm)	Wall Thickness (mm)										
	0,80	0,90	1,00	1,20	1,50	2,00	2,50	3,00	3,50	4,00	5,00
8 x 20											
10 x 10											
10 x 15											
10 x 18											
10 x 20											
10 x 25											
10 x 30											
10 x 33											
10 x 35											
10 x 40											
10 x 50											
12,7 x 12,7											
15 x 15											
15 x 20											
15 x 25											
15 x 30											
15 x 35											
15 x 40											
15 x 50											
16 x 16											
17 x 21											
17 x 35											
18 x 18											
18 x 30											
19 x 19											
20 x 20											
20 x 25											
20 x 30											
20 x 35											
20 x 40											
20 x 45											
20 x 50											
20 x 55											
20 x 60											
20 x 80											
21 x 21											
23 x 30											
25 x 25											
25,4 x 25,4											
25,4 x 50,80											
25 x 30											
25 x 35											
25 x 40											
25 x 45											
25 x 50											
25 x 55											
25 x 60											
27 x 27											
30 x 30											
30 x 35											
30 x 40											
30 x 45											
30 x 50											
30 x 60											
30 x 70											
30 x 80											
30 x 90											
32 x 32											
32 x 60											
33 x 60											
35 x 35											
35 x 40											
35 x 45											
35 x 50											
35 x 75											
38 x 38											
40 x 40											
40 x 50											
40 x 60											
40 x 70											
40 x 80											
44,5 x 44,5											
45 x 45											
50 x 50											
50 x 60											
50 x 80											
50,8 x 50,8											
60 x 60											
70x70											
80x80											
90x90											
100x100											
110x110											
120x120											
120x130											
120x140											
130x130											

(Thicknesses bigger than 5mm must be examined.)
Grades stronger than S700 must be examined.




COATINGS AND LININGS



COATINGS AND LININGS

Scope and Field of Application

Borusan Mannesmann products are manufactured with modern equipments offering a wide range of anti-corrosive coatings. The below graph illustrates the type of coatings applied externally and internally according to standards and special customer requirements.

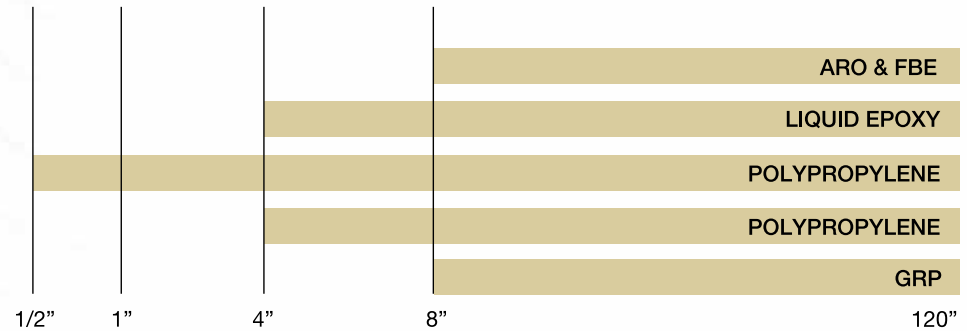

Surface Preparation

The process enabling the appropriate surface cleanliness and smoothness level according to the type of coating is applied by blasting method. (Sa 2 1/2)
(DIN 55928, SIS 55900)

Galvanizing

Especially for water pipes, BMB Galvanizing operations are currently applied to export U.S and many of European countries.
(ASTM A53, TS EN 10240)

Polyethylene - Polypropylene Coating

Excellent protection for buried pipes, high mechanical strength and corrosion resistance.

Low, medium or high-density polyethylene or polypropylene coating.

3 Layer Coating Method:

Layer 1: Electrostatic epoxy primer.

Layer 2: Extrusion adhesive wrapping for spiral, electrostatic adhesive layer for ERW.

Layer 3: Extrusion polyethylene or polypropylene wrapping for spiral, hot extrusion for ERW.

For PE: EN ISO 21809-1 (DIN 30670, NF A 49-710, UNI 9099)

For PP: EN ISO 21809-1 (DIN 30678, NFA 49-711)

Flow-Coat Epoxy Lining

For gas transmission lines in order to reduce pipewall roughness thus increasing throughput. Average thickness 60 µm. (API RP 5L2)

Liquid Epoxy

Various epoxy coatings enabling hygienic inner surface for potable water transportation and outer surface to resist soil or sea water corrosion. Coating thickness of up to 600 micron. (AWWA C 210, TS 5140, EN 12944-5)

FBE-Fusion Bonded Epoxy

Provides high protection of pipe lines used for transmission of oil, gas and water. (AWWA C 213, API 5L7, CSA Z 245-20, NACE RP 0394)

Abrasion Resistant Overlay ARO

Dual layer fusion bonded epoxy provides a perfect abrasion and impact resistance, also maintains an excellent protection for gas-oil line pipes. (AWWA C 213, API 5L7, CSA Z 245-20, NACE RP 0394)

Glass fibre reinforced plastic (GRP) Coating

For buried and HDD linepipes GRP coating provides excellent mechanical protection.

Tests Performed

Coating Thickness

Holiday Testing

Impact Strength

Adhesion Test

Indentation Strength

Coating Resistivity

Elongation Percentage at Break

Strain at Break Test

MFR and MVR Test

CD (Cathodic Disbondment Test)

DSC Test (Differential Scanning Calorimetry test)

Manuel Holiday

Wet Sponge Pinhole Test

Hot Water Immersion Test

Buchholz Hardness Test

Shore A & Shore D Measurement

PE/PP Breaking Elongation Test

Cross Cut Test

Epoxy Bend Test

V Cut Test

FBE Porosity Test

Porosity Test

Cross Section Porosity

Low temperature Flexibility Test

Cure & Gel Time Test

Moisture Content Test

FBE Particle Size Test

